


## Modern Tub Filler

- LG6-1MFB Finish(B)
- LG6-1MFC Finish(C)
- LG6-1MFBG Finish(BG)
- LG6-1MFD Finish(D)
- LG6-1MFK Finish(K)
- LG6-1MFY Finish(Y)

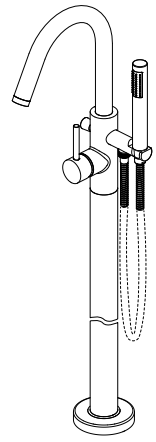

## Specifications

- All Metal Construction
- Trim Only, Valve Not Included

### Features

- 1.8 GPM Flow Rate (Handheld)
- 8 GPM @ 60 PSI Flow Rate
- 60" Metal Hose With Matching Finish
- All Metal Construction
- Ceramic Disc Valve
- Volume and Temperature Control
- Requires OX6-27OR Valve (Sold Separately)
- Optional Concrete Mounting Bracket 931-145 Available (Sold Separately)
- Pforever Warranty®


### Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified to ASME A112.18.1/CSA B125.1 including:
  - ASME A112.18.3 (Backflow Prevention)
- NSF 61/9 AnnexG Certified
- EPA WaterSense Certified
- CEC Certified/CALGreen compliant
- ADA Compliant - ANSI A117.1 (Lever Handles Only)



## Dimensions

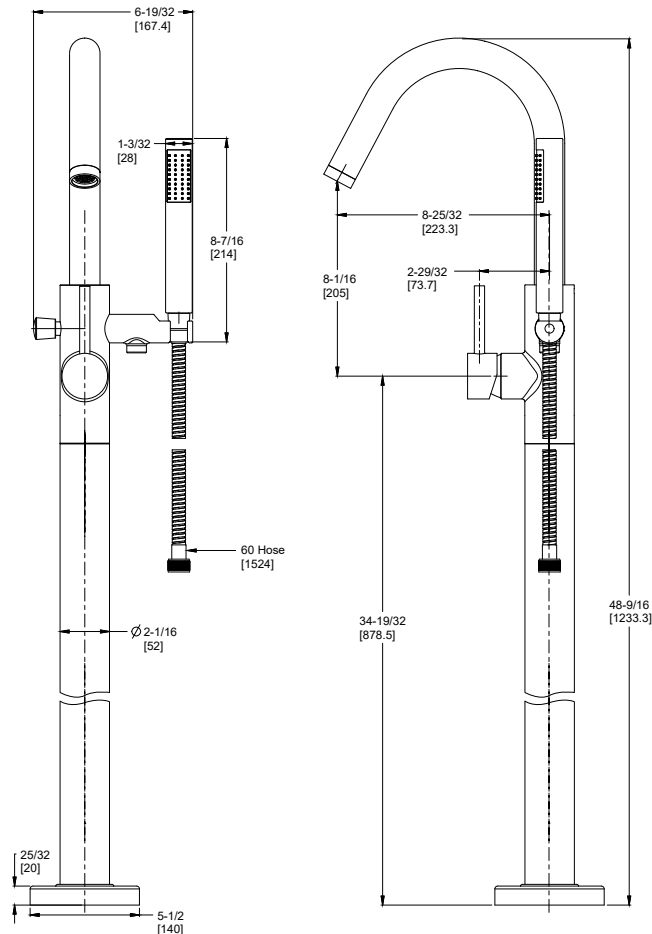

Ø3-3/8Max. Deck Hole Openings