

SPECIFICATION SUBMITTAL

442 SERIES LAVATORY FAUCET

PROJECT: _____

ARCHITECT: _____

BUILDER/DEVELOPER: _____

PLUMBING CONTRACTOR: _____

Price Pfister™

® Pfreshest Ideas in Pf faucets.

19701 DaVinci

Lake Forest, CA 92610

Phone (949) 672-4000

A  **BLACK & DECKER** COMPANY



442-5000



442-5005



442-6000



442-6005




442 SERIES—CHROME SINGLE CONTROL LAVATORY FAUCET WITH OR LESS POP-UP AND LOOP OR LEVER HANDLE

MODEL NUMBER	DESCRIPTION
--------------	-------------

4" centers, single control washerless valve, 1/2" inlets, 2.2 gpm., 8.33 L/min. at 60 psi. aerator


- 442-5000** Loop Handle Less Pop-Up
- 442-5005** Lever Handle Less Pop-Up
- 442-6000** Loop Handle With Pop-Up
- 442-6005** Lever Handle With Pop-Up

Price Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO certified 
- CSA B125 certified 
- ASME A112.18.1
- ANSI A117.1 (Lever handles only) 

INSTALLATION SPECIFICATIONS

442 SERIES LAVATORY FAUCET

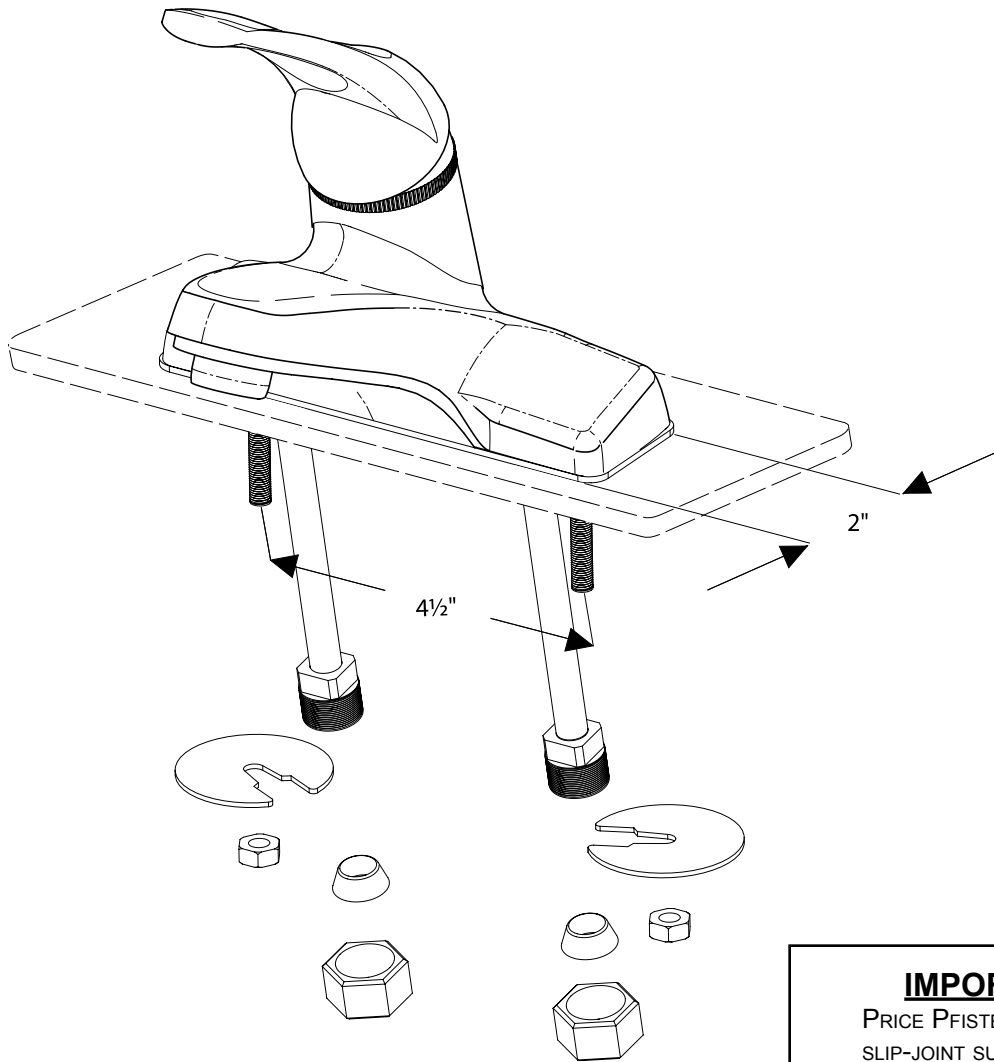

IMPORTANT NOTICE

PRICE PFISTER RECOMMENDS BEADING SLIP-JOINT SUPPLY TUBES, IF USED, TO PREVENT BLOW-OUT UNDER PRESSURE.

Rough-In Dimensions	Recommended
---------------------	-------------

Valve Inlets

- 1/2" Pipe for Slip Joint Nut
- 4" Centers
- 4 1/2" Between Mounting Studs

Rough-In Dimensions	Recommended
---------------------	-------------

Ledge Thickness	0" TO 1 1/2"
-----------------	--------------

Overflow Drain Sump

Thickness	1 5/16" TO 2" MAX.
-----------	--------------------

Hole Detail

1 1/8" to 1 1/2" Diameter

Spout Centerline to Spout Outlet	3 3/4"
----------------------------------	--------

Spout Outlet to Mounting Surface (air gap)	2" - 0"
--	---------

Lavatory pop-up drain plug can be installed for removable or vandal-proof service.

Price Pfister™

Pf Pfreshest Ideas in Pfaucets.