


F529-7ANS Finish(S)

F529-7ANY Finish(Y)

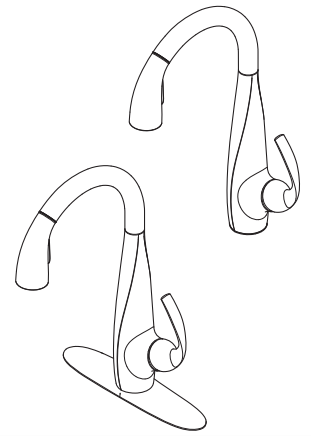

Specifications

- 1 or 3 Hole Installation
- Pforever Seal

Features

- 2.2 GPM Flow Rate
- Low Flow Regulator 941-408: 1.0 GPM
- Low Flow Regulator 941-414: 0.5 GPM
- 2 Function Pull-Down Sprayer
- 1 or 3-Hole Installation; Deck Plate or Single Hole Mounting Option
- 360° Rotating Spout
- High Arc Spout
- Convert to WaterSense or LEED Requirements with Separate Restrictor Insert
- Quick Install Tool
- Pfaster Connect
- Pforever Seal Ceramic Disc Valve
- Pforever Warranty®

Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified
- CSA B125 Certified
- ASME A112.18.1
- NSF 61/9 Annex G (Low lead)
- ADA Compliant-ANSI A117.1 (Lever handles only)



Dimensions

