

Specifications

Features

- 1.8 GPM Flow Rate
- 1 or 3-Hole Installation; Single Hole Mounting or Optional Deckplate
- 3 Function Pull-Down Sprayer (Spray, Stream, and Pause)
- 360° Rotating High Arc Swivel Spout
- 16.3" Pull-Down Hose Length
- MagnePfit™ Sprayhead Docking
- Auto-Align™ Sprayhead Docking
- Spot Defense™ Finish Resists Spots and Fingerprints (GS Finish Only)

- Easy to Clean Nozzles
- Forward Handle Operation
- Integrated Nylon Braided Supply Lines with 3/8" Connections
- Nylon Braided Hose
- Optional Deckplate Included
- Quick Install Tool Included
- TiteSeal™ Technology
- Pforever Seal™ Ceramic Disc Valve
- Limited Lifetime Warranty




Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified to ASME A112.18.1/CSA B125.1 including:
 - ASME A112.18.3 (Backflow Prevention)
- NSF/ANSI/CAN61:Q≤1
- CEC Certified/CALGreen compliant
- ADA Compliant - ANSI A117.1 (Lever Handle Only)



Dimensions

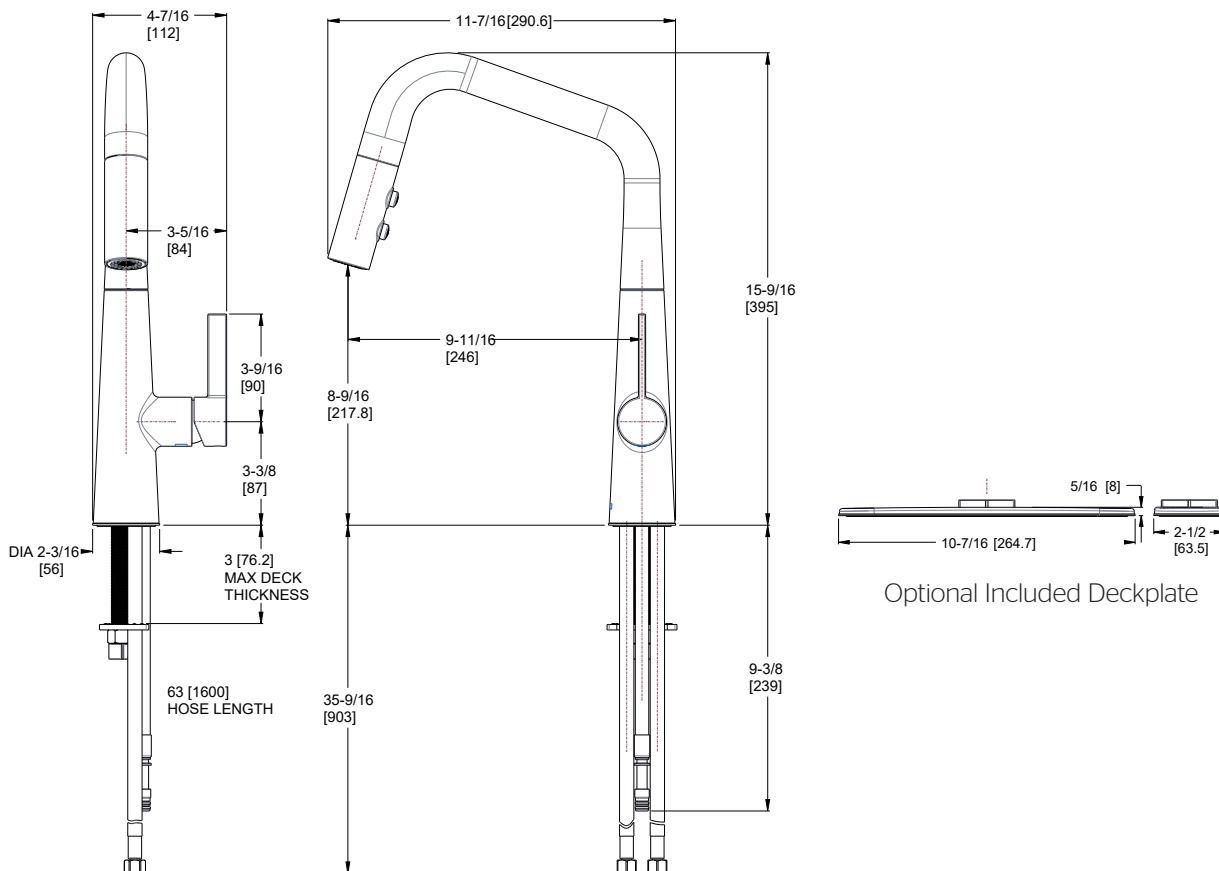

Ø1-3/8 Min to Ø1-1/2 Max. Deck Hole Openings