


F-529-7KVB Finish(B)

F-529-7KVC Finish(C)

F-529-7KVS Finish(S)



- AccuDock™ Sprayhead Docking
- Forward Handle Operation
- Pforever Seal™

## Specifications

### Features

- 1.8 GPM Flow Rate
- 12" Extended Hose Length
- Deckplate Included
- Nylon Braided Pull-Down Hose
- 2 Function Pull-Down Sprayer (Spray & Stream)
- AccuDock™ Sprayhead Docking
- 360° Rotating High Arc Swivel Spout
- Forward Handle Operation



- Integrated Nylon Braided Supply Lines with 3/8" Compression Fittings
- Quick Install Tool Included
- TiteSeal™ Technology
- Pfast Connect™
- Pforever Seal™ Ceramic Disc Valve
- Limited Lifetime Warranty

### Code Compliance


Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified to ASME A112.18.1/CSA B125.1 including:
  - ASME A112.18.3 (Backflow Prevention)
- NSF/ANSI/CAN61:Q≤1
- CEC Certified/CALGreen compliant
- ADA Compliant - ANSI A117.1 (Lever Handles Only)

### Dimensions

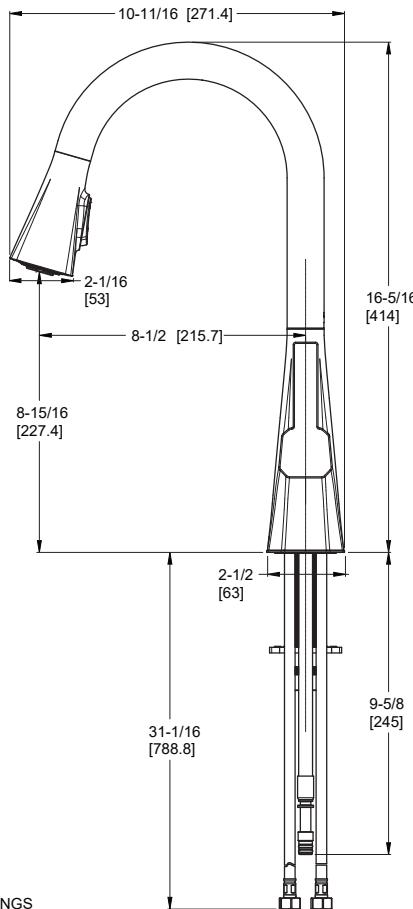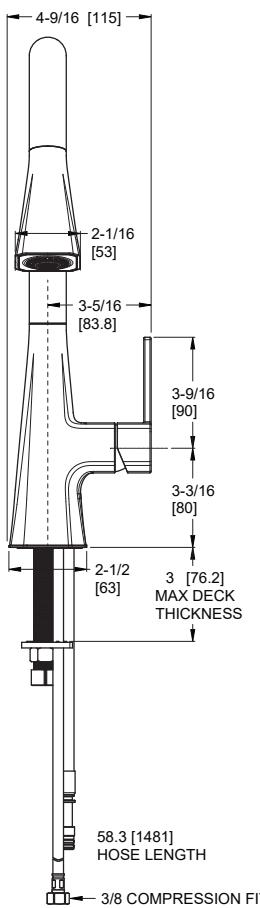

| Optional Aerators Available |             |
|-----------------------------|-------------|
| GPM                         | Part Number |
| 0.5 GPM                     | 941-820     |
| 1.0 GPM                     | 941-7069    |
| 1.5 GPM                     | 941-7079    |



Optional Deckplate

Ø13/8 Min to Ø11/2 Max. Deck Hole Openings