


F-529-7SYB Finish(B)
F-529-7SYGS Finish(GS)



Specifications

Features

- 1.8 GPM Flow Rate
- 1 or 3-Hole Installation; Single Hole Mounting or Optional Deckplate
- 3 Function Pull-Down Sprayer (Spray, Stream, and Pause)
- 3/8" Connections
- 360° Rotating High Arc Swivel Spout
- 16.3" Pull-Down Hose Length
- Spot Defense™ Finish Resists Spots and Fingerprints (BGS & GS Finish Only)

- MagnePfit™ Sprayhead Docking
- Auto-Align™ Sprayhead Docking
- Nylon Braided Supply Lines
- Nylon Hose
- Forward Handle Operation
- Wipe Clean Nozzles
- Pfast Connect™ Technology
- TiteSeal™ Technology
- Quick Install Tool
- Pforever Seal™ Ceramic Disc Valve
- Limited Lifetime Warranty




Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified to ASME A112.18.1/CSA B125.1 including:
 - ASME A112.18.3 (Backflow Prevention)
- NSF/ANSI/CAN61:Q≤1
- CEC Certified/CALGreen compliant
- ADA Compliant - ANSI A117.1 (Lever Handles Only)



Dimensions

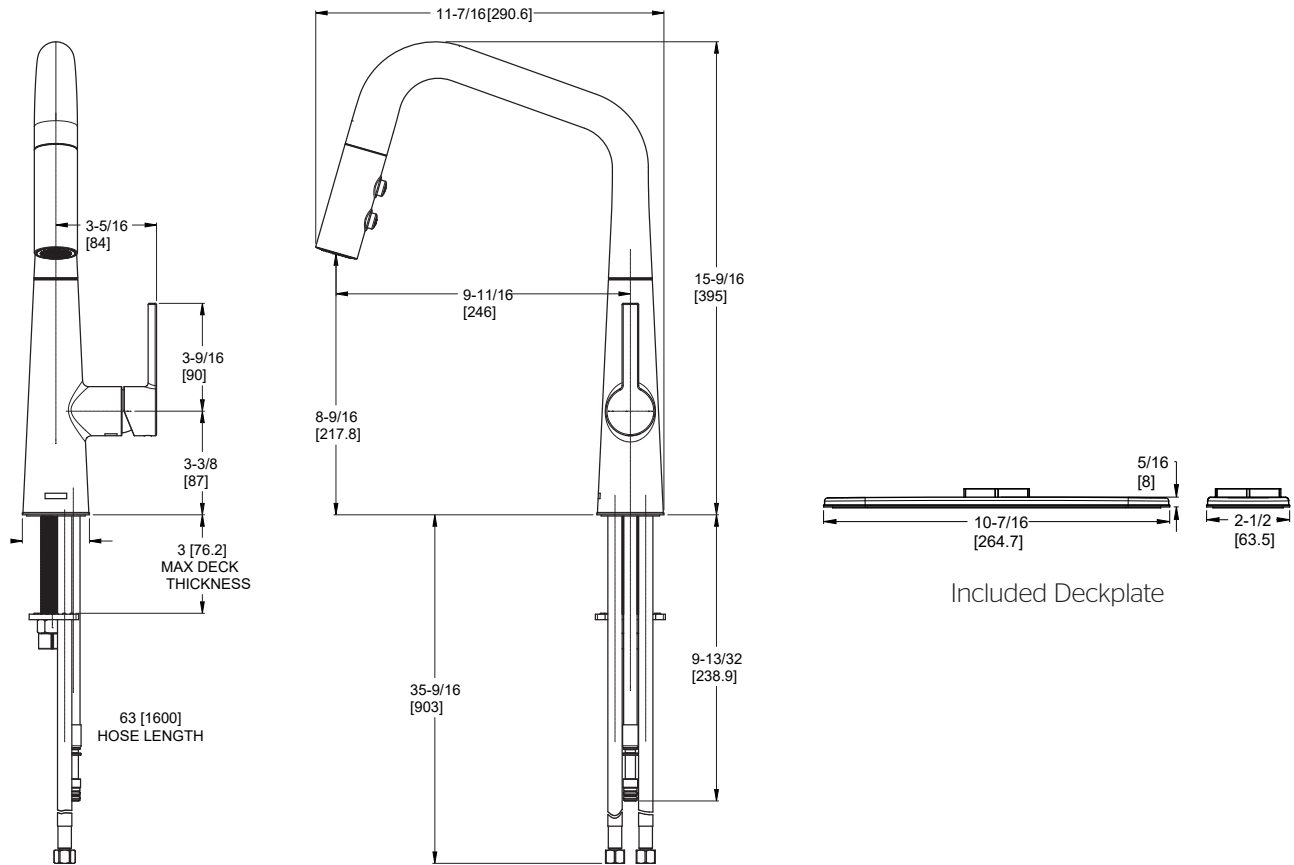

Ø1-3/8 Min to Ø1-1/2 Max. Deck Hole Openings