


- F-529-7VRIC Finish(C)
- F-529-7VRIGS Finish(GS)
- F-529-7VRISDB Finish(SDB)

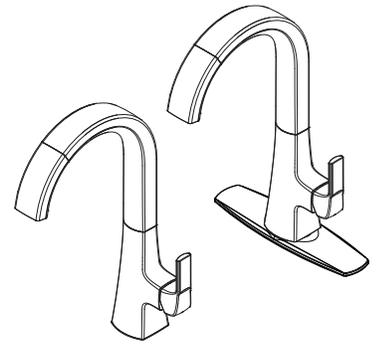

## Specifications

- MagnePfit™ With Auto-Align™ Docking
- TopPfit™ Installation

### Features

- 1.8 GPM Flow Rate
- 1 or 3-Hole Installation; Optional Included Deck Plate or Single Hole Mounting Option
- Auto-Align™ Sprayhead Alignment
- MagnePfit™ Sprayhead Docking
- 2 Function Pull-Down Sprayer (Spray and Stream)
- 360° Rotating High Arc Swivel Spout
- TopPfit™ Top Mount Installation
- TopPfit™ Install Tool Included
- Forward Handle Operation
- Spot Defense™ Finish Resists Spots and Fingerprints
- 15.5" Extended Pull-Down Length
- 3/8" Connections
- Nylon Hose
- Pfast Connect™ Adapter Technology
- Integrated Nylon Braided Supply Lines
- TiteSeal™ Technology
- Pforever Seal™ Ceramic Disc Valve
- Limited Lifetime Warranty




### Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified to ASME A112.18.1/CSA B125.1 including:
  - ASME A112.18.3 (Backflow Prevention)
- NSF/ANSI/CAN61:Q≤1
- CEC Certified/CALGreen compliant
- ADA Compliant - ANSI A117.1 (Lever Handle Only)



## Dimensions

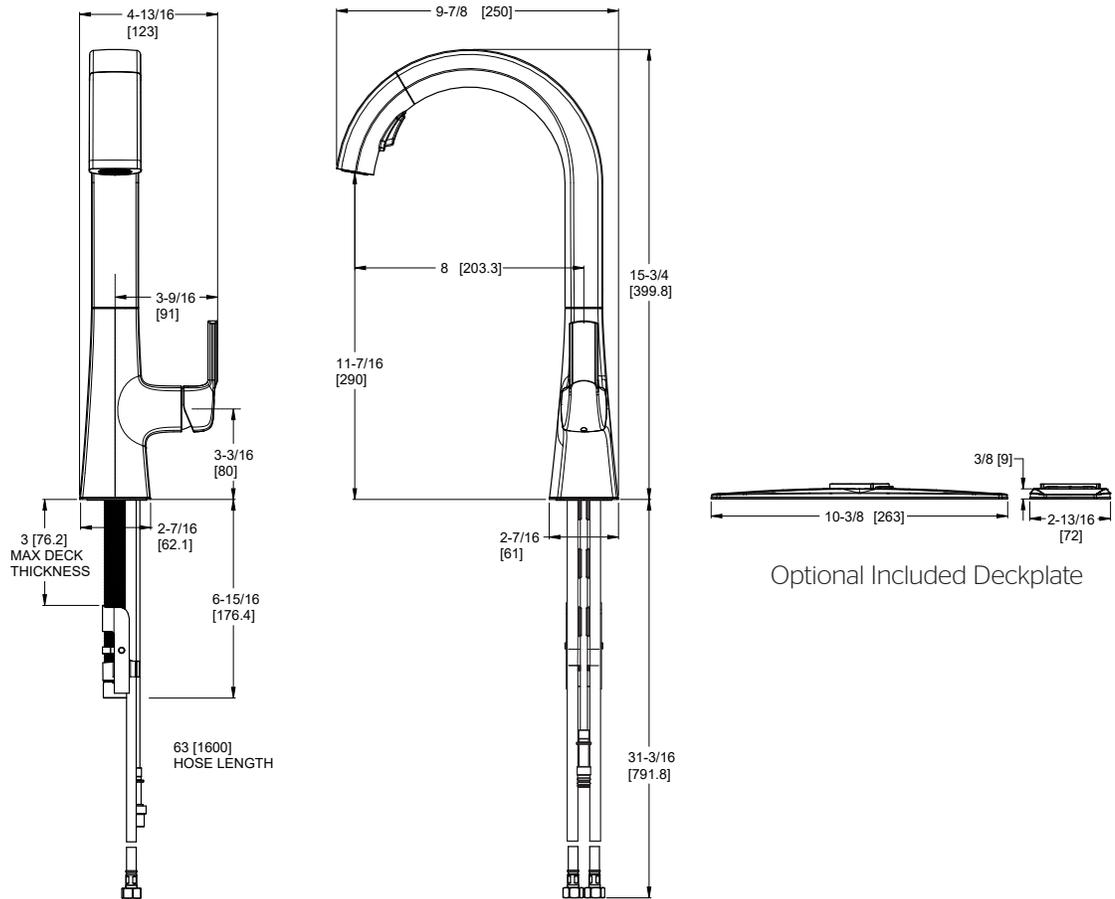

Ø1-3/8 Min to Ø1-1/2 Max. Deck Hole Openings