


- GT29-BIOC Finish(C)
- GT29-BIOS Finish(S)
- GT29-BIOSDB Finish(SDB)



Specifications

Features

- 1.5 GPM Flow Rate
- 360° Rotating Spout
- High Arc Spout
- Integrated Nylon Braided Supply Lines with 3/8" Connections
- Forward Handle Operation
- Optional Deckplate, Order 961-276*
- Spot Defense™ Finish Resists Spots and Fingerprints (SDB Only)
- TiteSeal™ Technology
- Pforever Seal™ Ceramic Disc Valve
- Limited Lifetime Warranty




Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified to ASME A112.18.1/CSA B125.1
- NSF/ANSI/CAN61:Q≤1
- CEC Certified/CALGreen compliant
- ADA Compliant - ANSI A117.1 (Lever Handle Only)



Dimensions

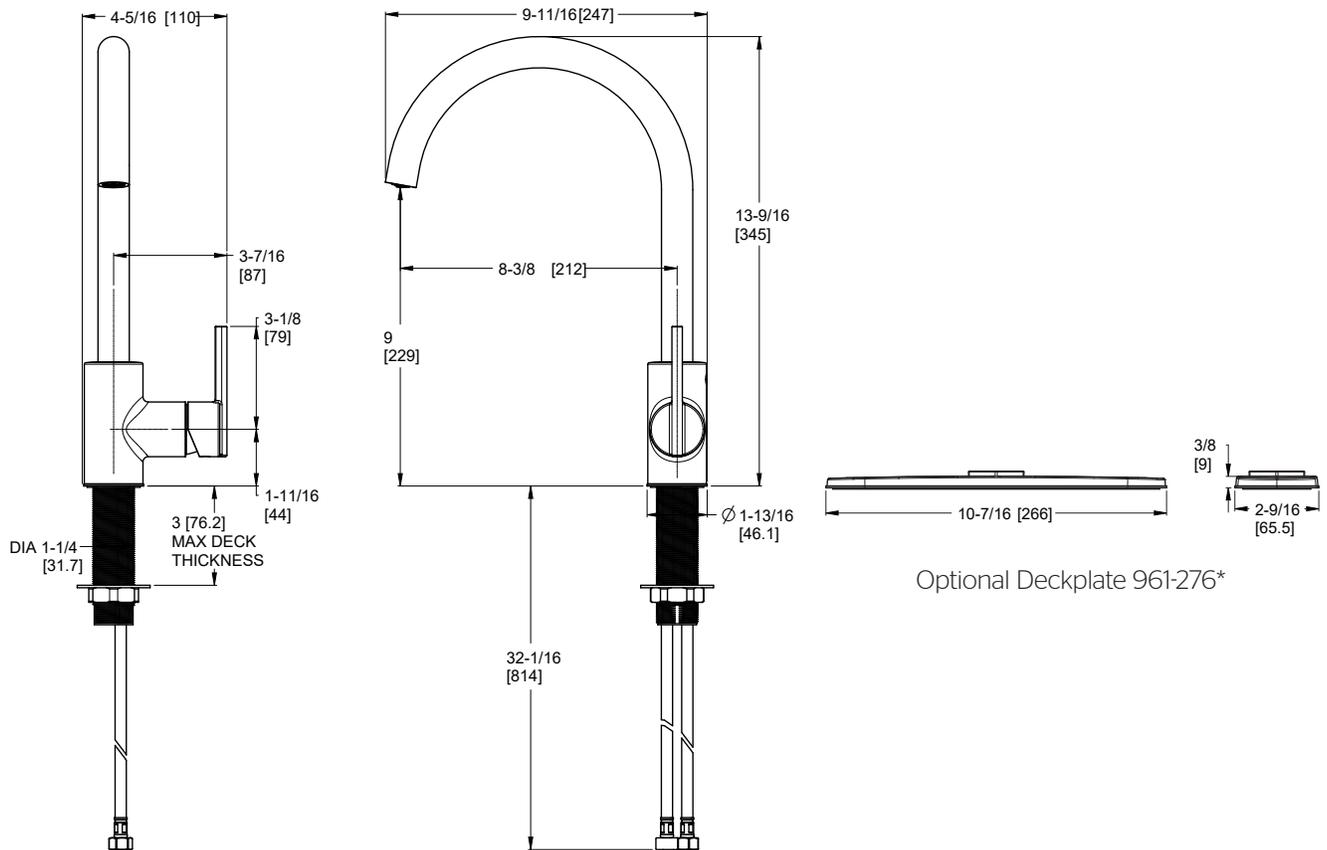

Ø1-3/8 Min to Ø1-1/2 Max. Deck Hole Openings

Optional Deckplate 961-276*