


- |   |   |
|---|---|
| GT529-ASRB Finish(B) <input type="checkbox"/>     | GT529-ASRBGS Finish(BGS) <input type="checkbox"/> |
| GT529-ASRBG Finish(BG) <input type="checkbox"/>   | GT529-ASRC Finish(C) <input type="checkbox"/>     |
| GT529-ASRBBG Finish(BBG) <input type="checkbox"/> | GT529-ASRGS Finish(GS) <input type="checkbox"/>   |



## Specifications

- MagnePfit™
- Spot Defense™

### Features

- 1.8 GPM Flow Rate
- 1 or 3-Hole Installation; Single Hole Mounting or Optional Deckplate
- 3 Function Pull-Down Sprayer (Spray, Stream, and Pause)
- 3/8" Connections
- 36" Nylon Braided Supply Lines
- 360° Rotating Swivel Spout
- 16.3" Pull-Down Hose Length
- MagnePfit™ Sprayhead Docking
- Spot Defense™ Finish Resists Spots and Fingerprints
- Nylon Hose
- Forward Handle Operation
- Optional Deckplate, Order 961-278\* Separately
- Easy to Clean Nozzles
- TiteSeal™ Technology
- Pforever Seal™ Ceramic Disc Valve
- Limited Lifetime Warranty




### Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified to ASME A112.18.1/CSA B125.1 including:
  - ASME A112.18.3 (Backflow Prevention)
- NSF/ANSI/CAN61:Q≤1
- CEC Certified/CALGreen compliant
- ADA Compliant - ANSI A117.1 (Lever Handles Only)



## Dimensions

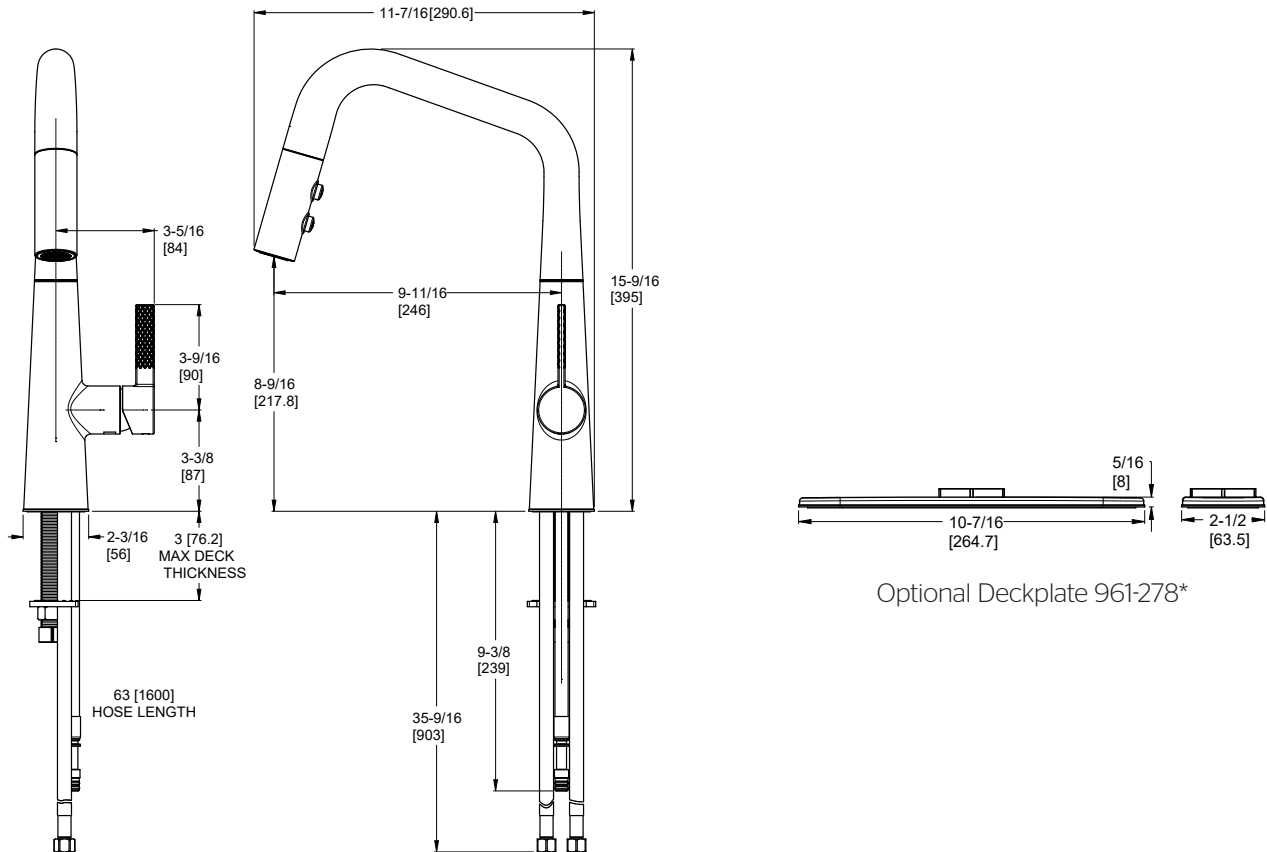

Ø1-3/8 Min to Ø1-1/2 Max. Deck Hole Openings