


## Brislin™ Pull-Down Kitchen Faucet



- GT529-BIB Finish(B)
- GT529-BIC Finish(C)
- GT529-BID Finish(D)
- GT529-BIS Finish(S)

### Specifications

- AutoDock™ Sprayhead
- Pforever Seal™

### Features

- 1.8 GPM Flow Rate
- 2 Function Pull-Down Sprayer (Spray and Stream)
- 3/8" Connections
- 36" Integrated Nylon Braided Supply Lines
- 360° Rotating High Arc Spout
- 15" Pull-Down Hose Length
- Nylon Hose
- AutoDock™ Self-Retracting Sprayhead
- Forward Handle Operation
- Optional Deckplate, Order 961-276\* Separately
- Wipe Clean™ Nozzles
- Pfaster Connect™
- TiteSeal™ Technology
- Pforever Seal™ Ceramic Disc Valve
- Pforever Warranty®




### Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified to ASME A112.18.1/CSA B125.1 including:
  - ASME A112.18.3 (Backflow Prevention)
- NSF 61/9 AnnexG Certified
- CEC Certified/CALGreen compliant
- ADA Compliant - ANSI A117.1 (Lever Handles Only)



### Dimensions

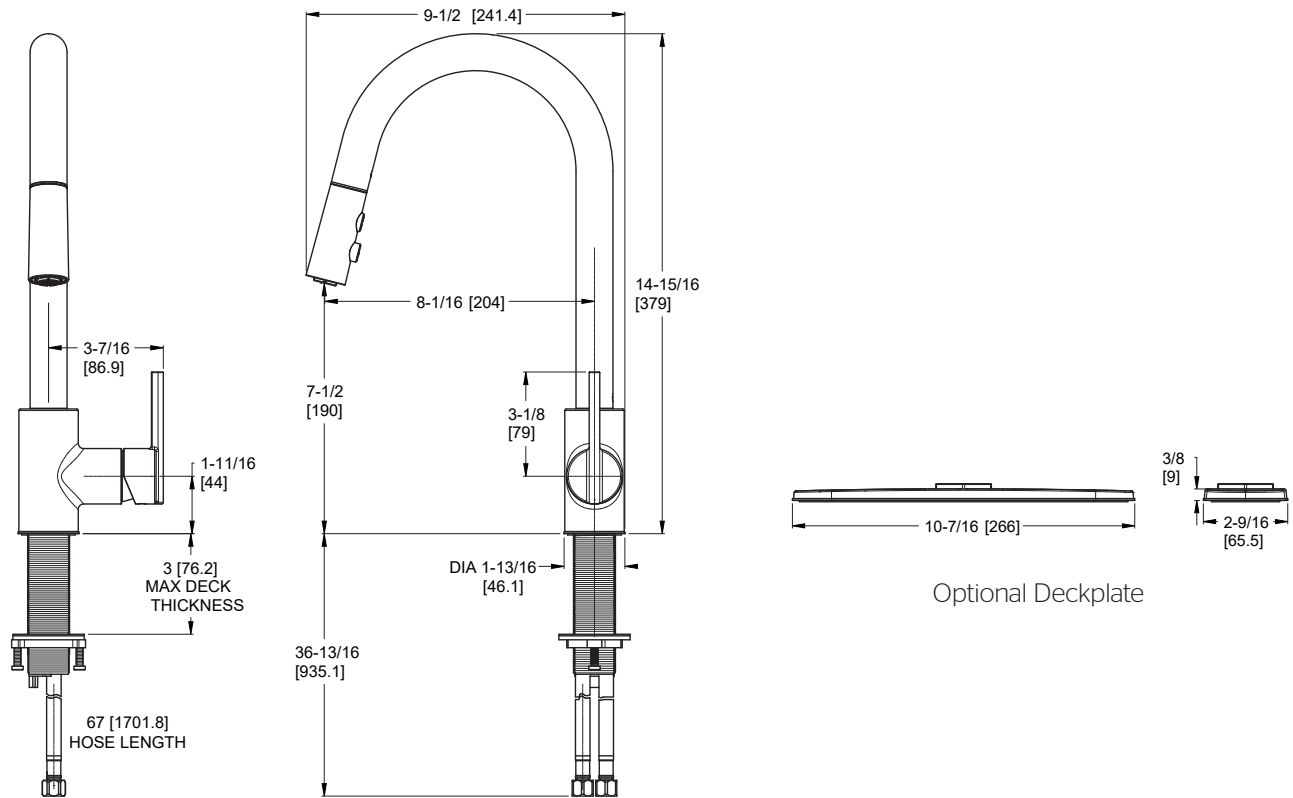

Ø1-3/8 Min to Ø1-1/2 Max. Deck Hole Openings