


## Havenridge™ Pull-Down Kitchen Faucet



- GT529-HVOBG Finish(BG)
- GT529-HVOC Finish(C)
- GT529-HVOD Finish(D)
- GT529-HVOGS Finish(GS)
- GT529-HVOSDB Finish(SDB)

### Specifications

- MagnePfit™ Sprayhead
- Pforever Seal™

### Features

- 1.8 GPM Flow Rate
- 1-Hole Installation
- 3 Function Pull-Down Sprayer (Stream, Spray, and HydroBlade™)
- 360° Rotating High Arc Spout
- MagnePfit™ Sprayhead Docking
- 14.5" Extended Hose Length
- 65" Nylon Braided Hose
- 30-5/8" Nylon Braided Supply Lines
- 3/8" Connections
- Forward Handle Operation
- Optional Deckplate Available, Order 961-272\* Separately
- TiteSeal™ Technology
- Wipe Clean Nozzles
- Pforever Seal™ Ceramic Disc Valve
- Limited Lifetime Warranty




### Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:


- IAPMO Certified to ASME A112.18.1/CSA B125.1 including:
  - ASME A112.18.3 (Backflow Prevention)
- NSF/ANSI/CAN61:Q≤1
- CEC Certified/CALGreen compliant
- ADA Compliant - ANSI A117.1 (Lever Handle Only)



### Dimensions

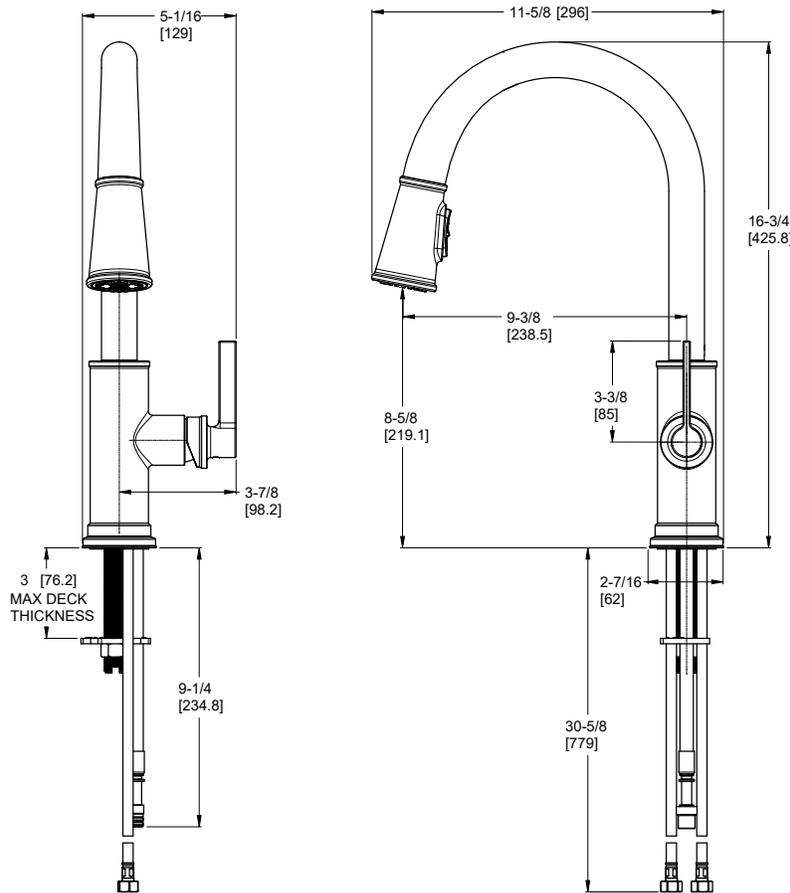

Optional Aerators Available	
GPM	Part Number
1.0 GPM	941-444
1.5 GPM	941-683



Optional Deckplate 961-272\*

Ø1-3/8 Min to Ø1-1/2 Max. Deck Hole Openings