

Pfirst Modern™ Pull-Down Kitchen Faucet

- GT529-PFM2C Finish(C) ☐
- GT529-PFM2S Finish(S) ☐
- GT529-PFM2SDB Finish(SDB) ☐



Specifications

Features

- 1.5 GPM Flow Rate
- 14" Extended Hose Length
- 360° Rotating High Arc Spout
- 2 Function Pull-Down Sprayer (Spray and Stream)
- AutoDock™ Spray Head Docking
- 60" Braided Nylon Hose
- 12" Pull-Down Hose Length
- Forward Handle Operation
- Optional Deckplate Included
- 32" Integrated Nylon Braided Supply Lines with 3/8" Connections
- TiteSeal™ Technology
- Spot Defense™ Finish Resists Spots and Fingerprints (SDB Only)
- Pforever Seal™ Ceramic Disc Valve
- Limited Lifetime Warranty




Product Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified to ASME A112.18.1/CSA B125.1 including:
 - ASME A112.18.3 (Backflow Prevention)
- NSF/ANSI/CAN61:Q≤1
- CEC Certified/CALGreen compliant
- ADA Compliant - ANSI A117.1 (Lever Handle Only)



Dimensions

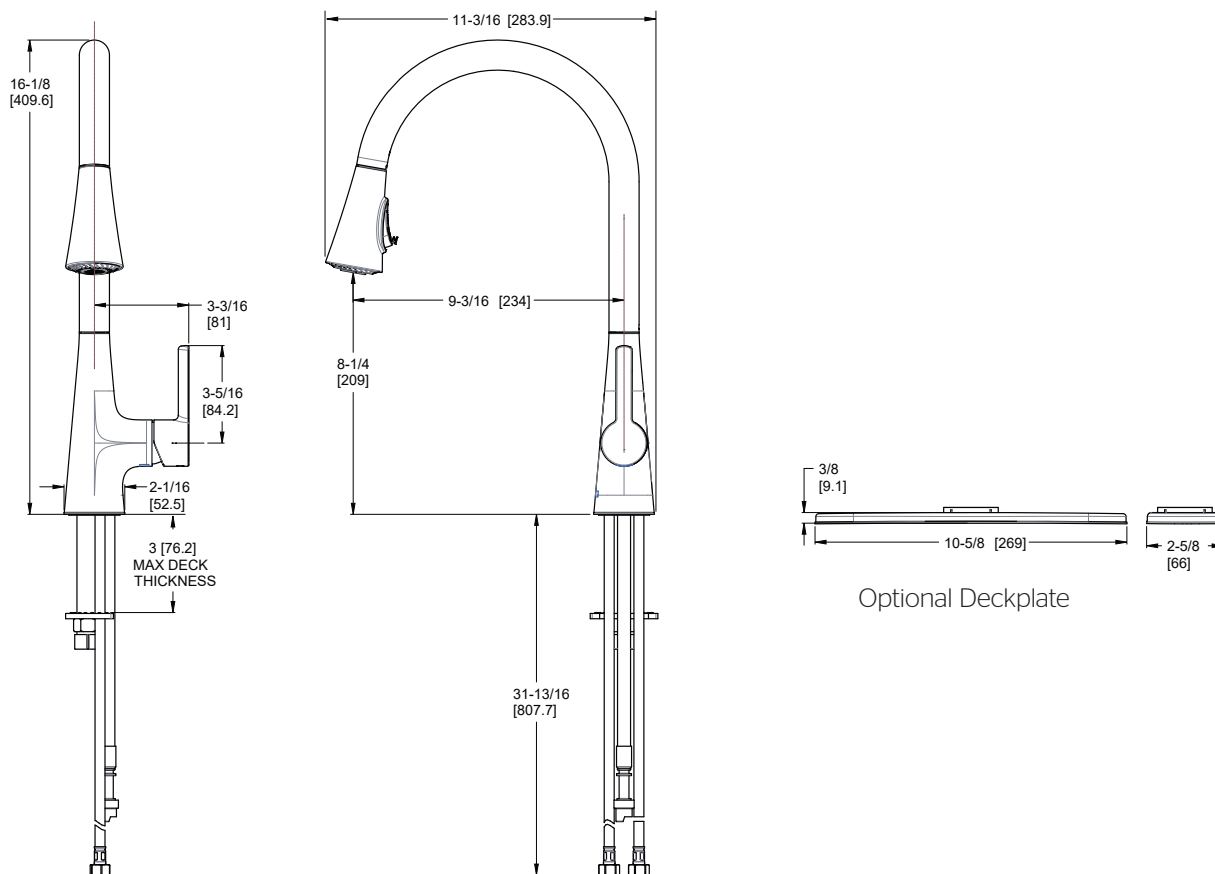

Ø1-3/8 Min to Ø1-1/2 Max. Deck Hole Openings