


- GT529-TMC Finish(C)
- GT529-TMS Finish(S)
- GT529-TMY Finish(Y)

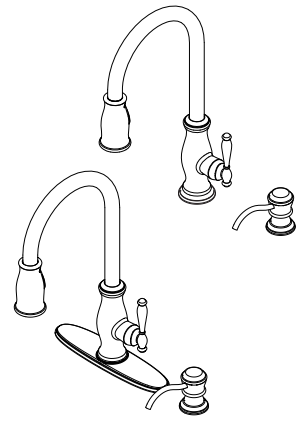

- 1, 2, 3, or 4-Hole Installation
- Volume Control Sprayhead
- Pforever Seal

Specifications

Features

- 1.8 GPM Flow Rate
- 1, 2, 3, or 4-Hole Installation; Deck Plate or Single Hole Mounting Option
- 2 Function Sprayhead with Volume Control
- 60" Nylon Hose
- Pfast Connect™
- Soap Dispenser
- Quick Install Tool
- Pforever Seal Ceramic Disc Valve
- Pforever Warranty®

Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified
- CSA B125 Certified
- ASME A112.18.1
- NSF 61/9 Annex G (Low lead)
- Cal Green Compliant
- CEC Compliant
- ASME A112.18.3 (Backflow Prevention)
- ADA Compliant-ANSI A117.1 (Lever handles only)



Dimensions

