

## Specifications

## Features

- 1.2 GPM Flow Rate
- All Metal Construction
- 1 or 3-Hole Installation, Optional Deckplate Included
- Includes Push & Seal™ Drain
- Pforever Seal™ Ceramic Disc Valve
- Limited Lifetime Warranty


## Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified to ASME A112.18.1/CSA B125.1
- NSF/ANSI/CAN61:Q≤1
- CEC Certified/CALGreen compliant
- EPA WaterSense Certified
- ADA Compliant - ANSI A117.1 (Lever Handle Only)




## Dimensions

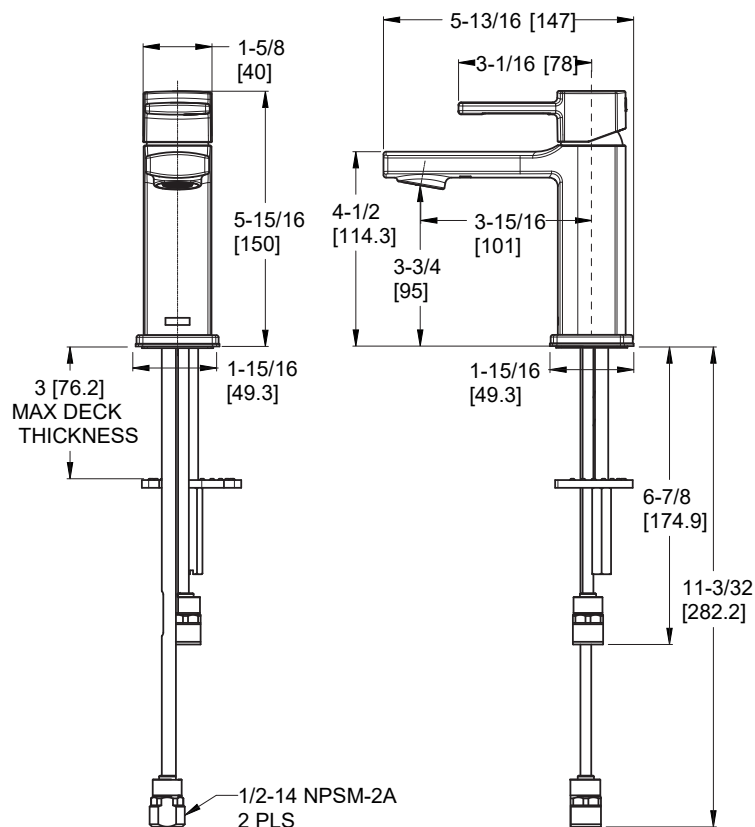

Ø1 Min to Ø1-1/2 Max. Deck Hole Openings

### Optional Included Deckplate

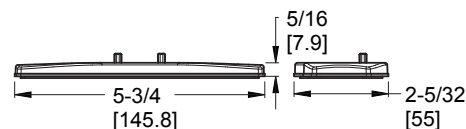

## Push &amp; Seal™

