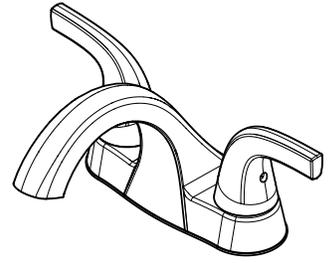# PfISTER

Framework™
4" Centerset Lavatory Faucet

LF-048-FWBB Finish*(BB)* ❑
LF-048-FWCC Finish*(CC)* ❑
LF-048-FWKK Finish*(KK)* ❑

Specifications

Features

• 1.2 GPM Flow Rate
• Washerless Cartridges
• Push & Seal™ Pop-Up
• Supply Lines Not Included
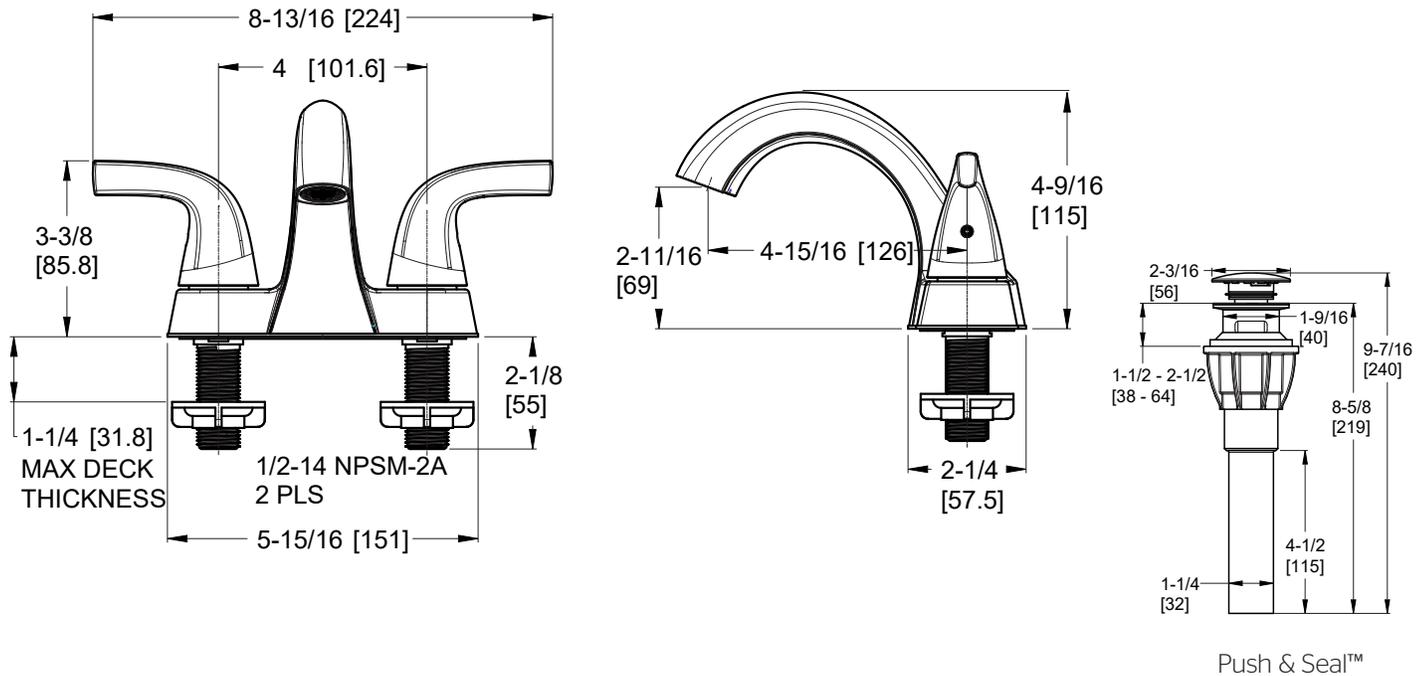• Limited Lifetime Warranty

Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

• IAPMO Certified to ASME A112.18.1/CSA B125.1
• EPA WaterSense Certified
• NSF/ANSI/CAN61:Q≤1
• CEC Certified/CALGreen compliant
• ADA Compliant – ANSI A117.1 (Lever Handles Only)

Dimensions

8-13/16 [224]
4 [101.6]
3-3/8 [85.8]
2-1/8 [55]
1-1/4 [31.8] MAX DECK THICKNESS
1/2-14 NPSM-2A 2 PLS
5-15/16 [151]

4-9/16 [115]
2-11/16 [69]
4-15/16 [126]
2-1/4 [57.5]

2-3/16 [56]
1-9/16 [40]
1-1/2 - 2-1/2 [38 - 64]
9-7/16 [240]
8-5/8 [219]
4-1/2 [115]
1-1/4 [32]

Push & Seal™

Ø1 Min to Ø1-1/2 Max. Deck Hole Openings

1-800-PFAUCET (732-8238) • pfisterfaucets.com/support

August 22, 2025

SS-LF048-FWXX