

## Specifications

### Features

- 1.2 GPM Flow Rate
- All Metal Construction
- Includes Push & Seal™ Drain
- Ultra Seal Ceramic Disc Valves
- Fixed Hubs
- Quick Install Tool Included
- Limited Lifetime Warranty


### Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified to ASME A112.18.1/CSA B125.1
- NSF/ANSI/CAN61:Q≤1
- CEC Certified/CALGreen compliant
- EPA WaterSense Certified
- ADA Compliant - ANSI A117.1 (Lever Handle Only)



## Dimensions

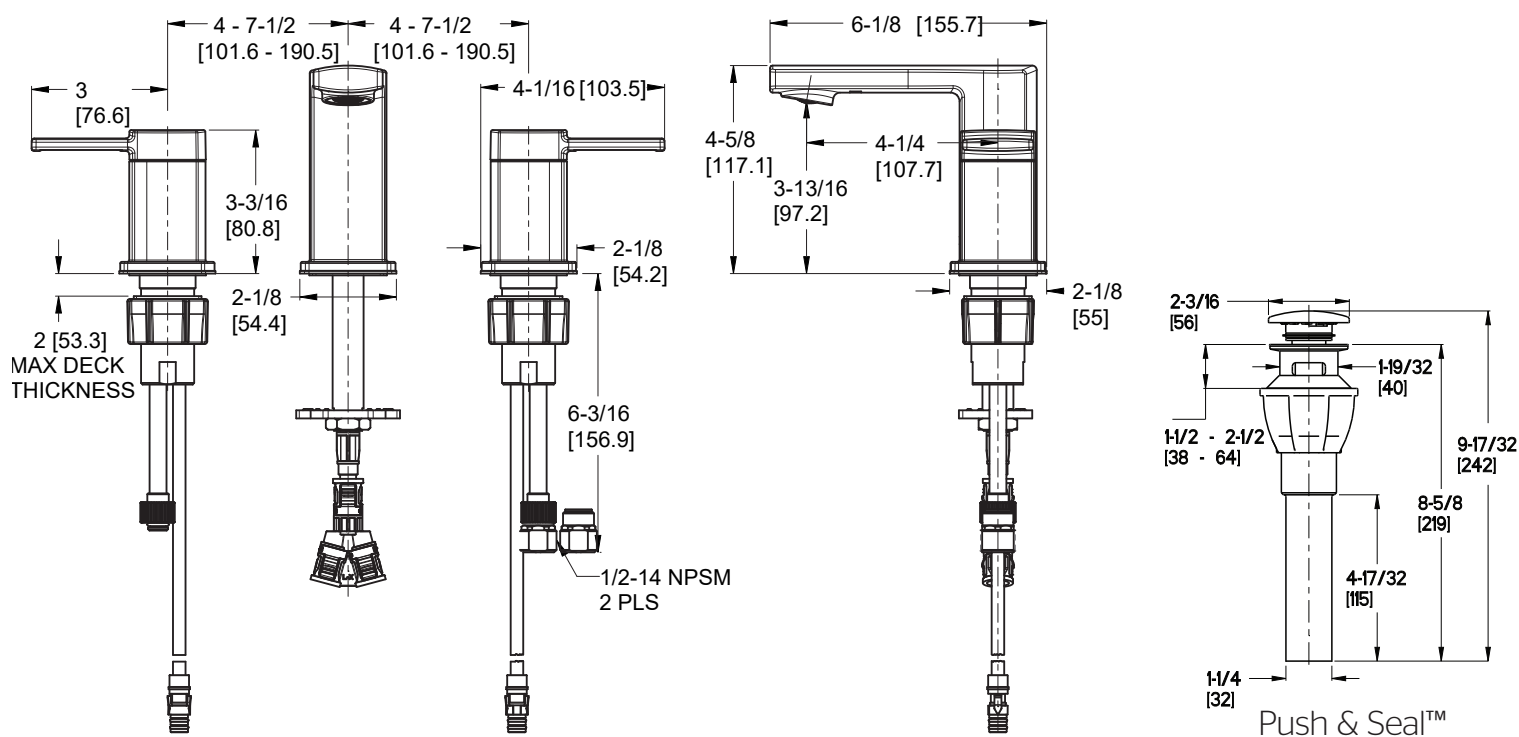

Ø1-1/7 Min to Ø1-1/2 Max. Deck Hole Openings