


- LF-049-ZLB Finish(B)
- LF-049-ZLC Finish(C)
- LF-049-ZLGS Finish(GS)

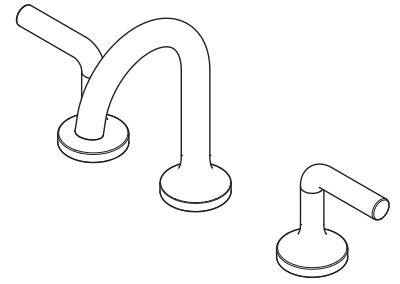

Specifications

Features

- 1.2 GPM Flow Rate
- High Arc Spout
- Quick Install Tool Included
- Push & Seal™ Drain Included
- Pfast Connect™ Supply Lines
- Spot Defense™ Finish Resists Spots and Fingerprints (GS Finish Only)
- TiteSeal™ Technology
- Pforever Seal Ceramic Disc Valves
- Pforever Warranty®

Code Compliance

- Pfister products are designed and manufactured in compliance with the following standards and codes:
- IAPMO Certified to ASME A112.18.1 / CSA B125
 - NSF 61/9 & 372 (Low Lead)
 - CEC Compliant
 - Cal Green Compliant
 - ADA Compliant-ANSI A117.1 (Lever Handles Only)
 - EPA WaterSense Certification 1.2 gpm, 4.5 L/Min



Dimensions

