


8"-20" Widespread Faucet

- | | |
|---|---|
| LG49-COLØB Finish(B) <input type="checkbox"/> | LG49-COLØD Finish(D) <input type="checkbox"/> |
| LG49-COLØBG Finish(BG) <input type="checkbox"/> | LG49-COLØK Finish(K) <input type="checkbox"/> |
| LG49-COLØC Finish(C) <input type="checkbox"/> | LG49-COLØY Finish(Y) <input type="checkbox"/> |

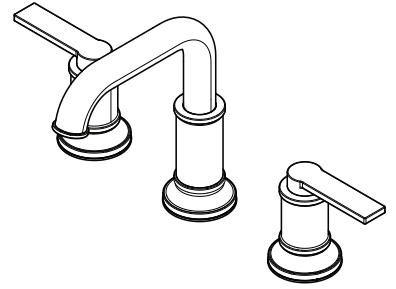

Specifications

Features

- 1.2 GPM Flow Rate
- All Metal Construction
- 3-Hole Installation
- Concealed Screws
- Fixed Hubs
- Supply Lines Not Included
- TiteSeal™ Technology
- Push & Seal™ Drain
- Pfast Connect™
- Pforever Seal™e Ceramic Disc Valve
- Limited Lifetime Warranty

- All Metal Construction
- Pforever Seal™

Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified to ASME A112.18.1/CSA B125.1
- NSF 61/9 AnnexG Certified
- EPA WaterSense Certified
- CEC Certified/CALGreen compliant
- ADA Compliant - ANSI A117.1 (Lever Handles Only)



Dimensions

