

- LG49-TBOTL BG Finish(BG)
- LG49-TBOTLC Finish(C)
- LG49-TBOTLD Finish(D)
- LG49TBOTLK Finish(K)
- LG49-TBOTLSDB Finish(SDB)

- All Metal Construction
- 3-Hole Installation
- Pforever Seal™

## Specifications

### Features

- 1.2 GPM Flow Rate
- All Metal Construction
- Includes Metal Push & Seal™ Drain
- High Arc Spout
- Pforever Seal™ Ceramic Disc Valves
- Spot Defense™ Finish Resists Spots and Fingerprints (SDB Only)
- Supply Lines Not Included
- Limited Lifetime Warranty


### Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified to ASME A112.18.1/CSA B125.1
- NSF/ANSI/CAN61:Q≤1
- CEC Certified/CALGreen compliant
- EPA WaterSense Certified
- ADA Compliant - ANSI A117.1 (Lever Handles Only)



## Dimensions

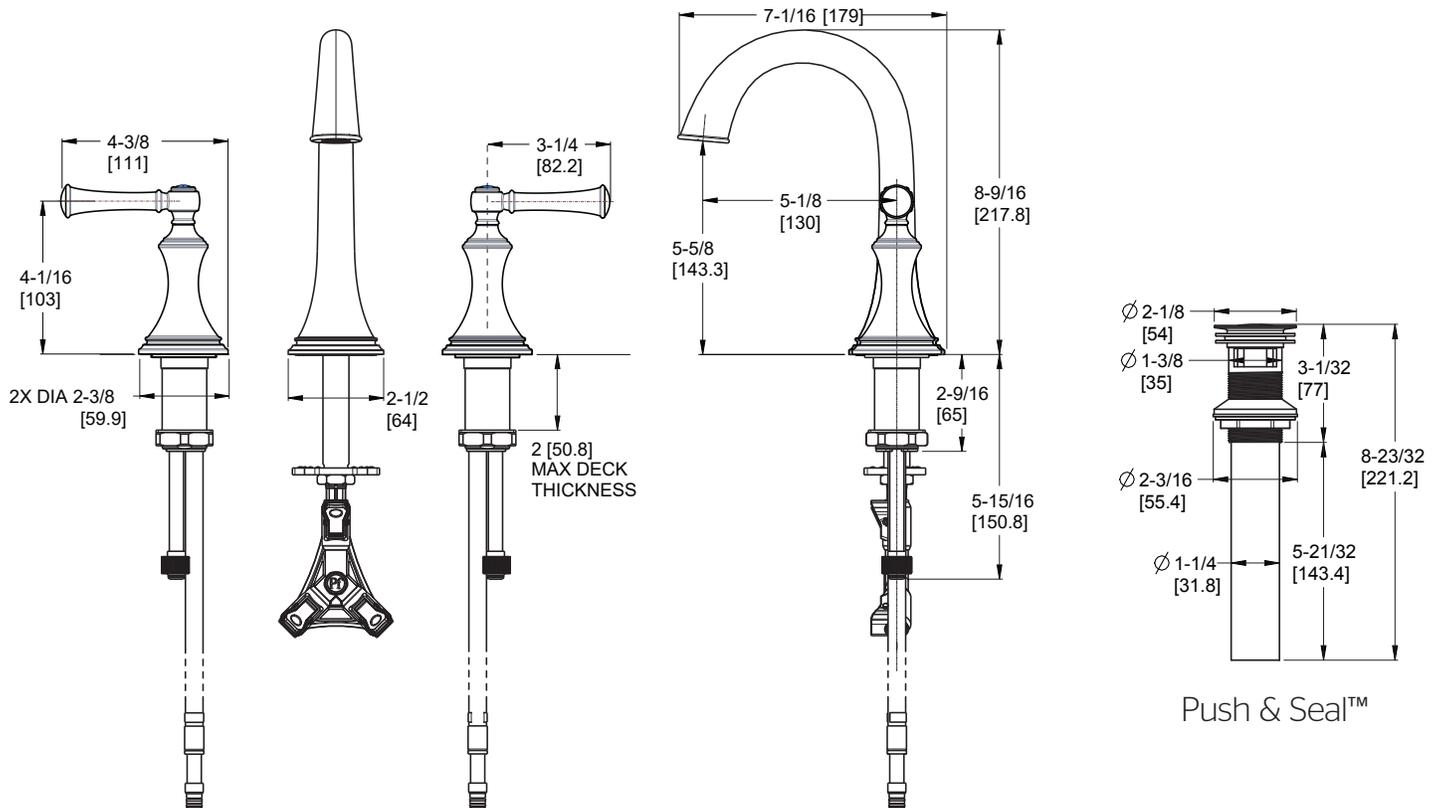

Ø1-1/4 Min to Ø1-1/2 Max. Deck Hole Openings