


- T46-MOBC Finish(CC)
- T46-MOBE Finish(EE)
- T46-MOBK Finish(KK)
- T46-MOBU Finish(UU)
- T46-MOBY Finish(YY)

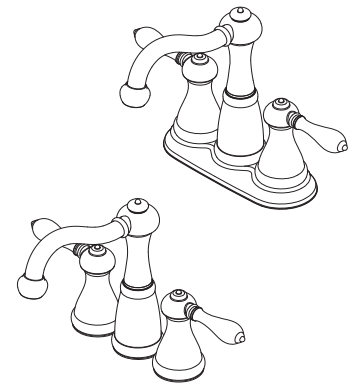

Specifications

Features


- Fixed Underbody
- Solid Brass Construction
- Metal Lever Handles
- Includes Metal Supply Nuts
- Accommodates Up to 2" Deck Thickness
- 3-Hole Installation
- 4" Centerset and Mini Widespread Combination
- 2.2 GPM (8.33 L/M) Flow Rate
- Install With or Without Deck Plate
- Metal Pop-Up
- High-Arc Decorative Spout
- Pforever Seal Ceramic Disc Valve
- Pforever Warranty®

Code Compliance

- Pfister products are designed and manufactured in compliance with the following standards and codes:
- IAPMO Certified
 - CSA B125 Certified
 - ASME A112.18.1
 - Cal Green Compliant
 - ADA Compliant-ANSI A117.1 (Lever handles only)



Dimensions

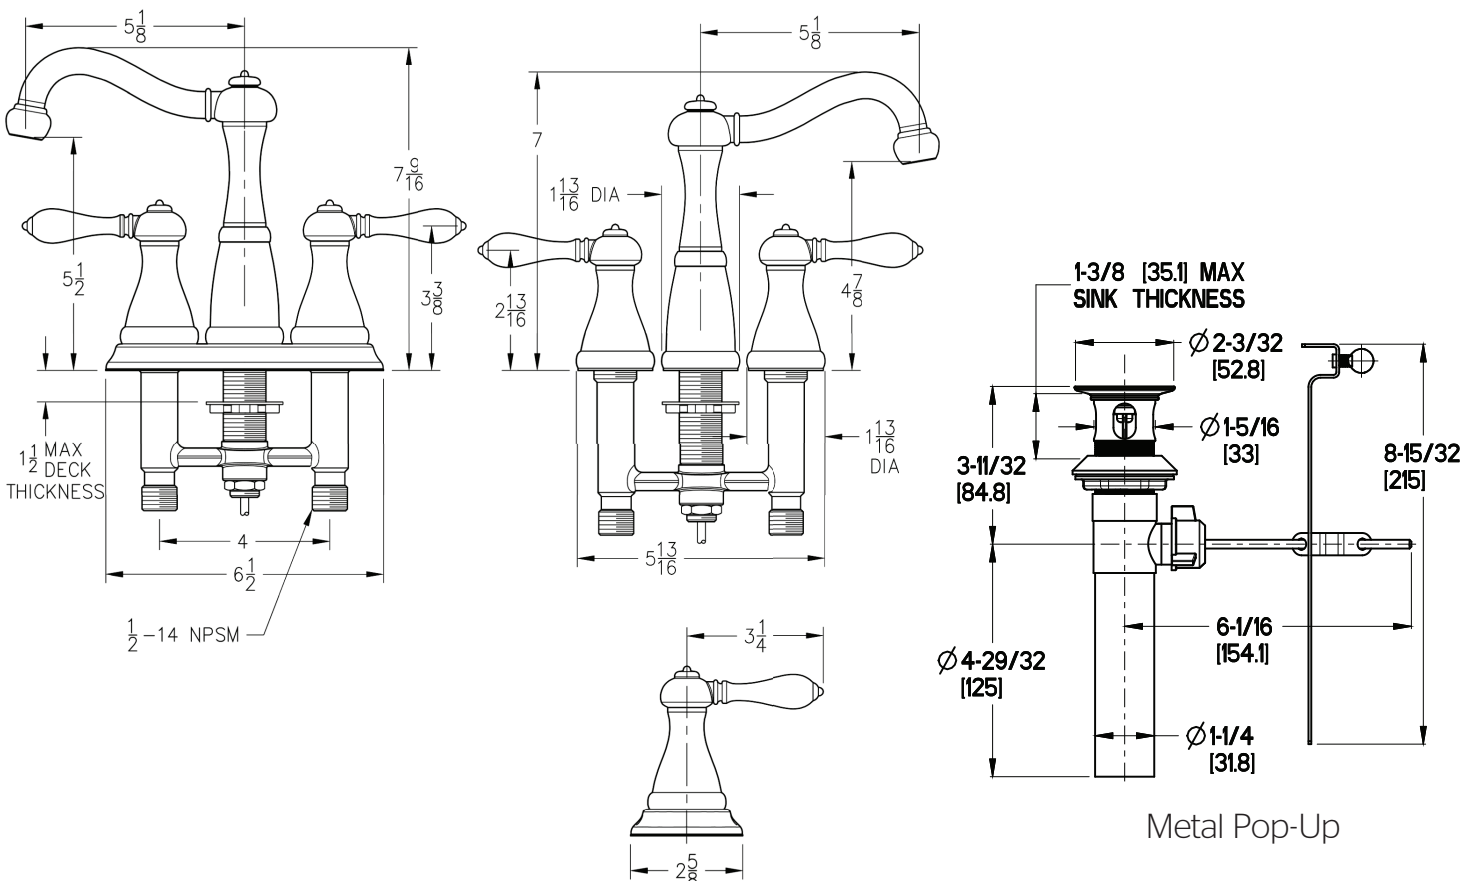

Ø1 Min to Ø1-1/2 Max. Deck Hole Openings

Metal Pop-Up