SPECIFICATION SUBMITTAL

Highlights

- 1/4 Turn Ceramic Disc Valves
- Complete Collection with Coordinating Roman Tub and Tub & Shower Options
- Pforever Warranty®

Code Compliance

Price Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO certified ASME A112.18.1
- CSA B125 certified ANSI A117.1 (Lever handles only)

Finishes	T49-ST0C	T49-ST0K	T49-ST0Y
Tuscan Bronze			Х
Polished Chrome	Х		
Satin Nickel		Х	

Features	749-ST0C	749-STOK	749-ST0Y
		7	<u>х</u>
Metal Lever Handles	Х	Х	
3-Hole Installation	X	Х	Χ
8"-15" Variable Installation	Х	Χ	Х
ADA Approved	Х	Χ	Х
Metal Pop-Up	Х	Χ	Х
High Arc Spout	Х	Χ	Х
1/4 Turn Ceramic Disc Valves	Х	Χ	Х
Step-By-Step Installation Instructions	Х	Χ	Х
Pforever Warranty®	Х	Х	Χ

49 Series

SANTIAGO.

8"-15" Widespread Faucet

Lever Handles
3-Hole Installation
1/4 Turn Ceramic Disc Valves



For additional information, please contact your Price Pfister representative, or visit our website at www.pricepfister.com.

Project:

1-800-PFAUCET www.pricepfister.com
19701 DaVinci, Lake Forest, CA 92610
06/13/07




49 Series

SANTIAGO.

8"-15" Widespread Faucet

Critical Dimensions: 1 - 1 1/2 Dia Thru Hole 3 Places Minimum Hole Size Valve Centerline to 2 1/16 Min. Finished Wall

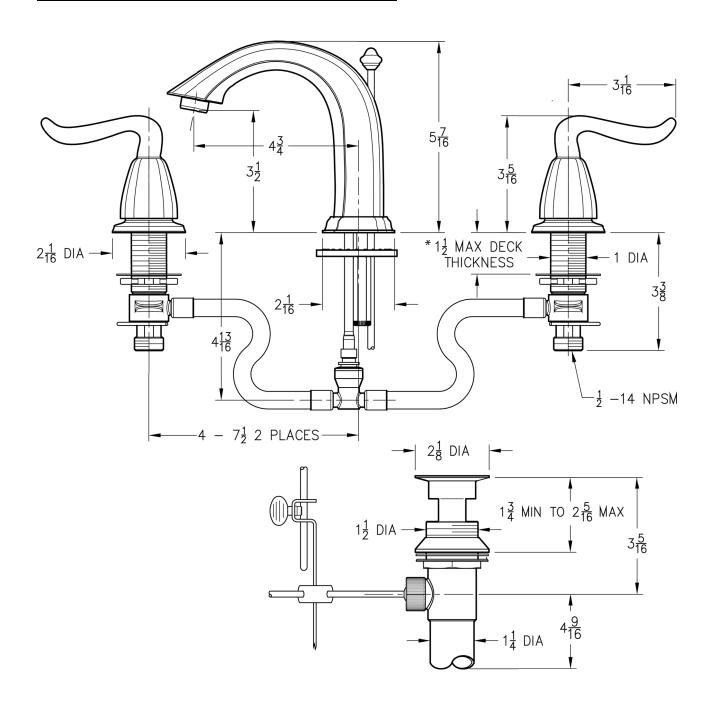

* If installation surface depth is thicker than $1 \frac{1}{2}$ ", order Extension Kit 971-026.



When using the compression fittings in this package, with these types of installations, the installer must flare or bead the water supply lines to avoid blow-out conditions. Avoiding such steps in the installation of the unit may result in water damage.

Connect inlet supply lines by assembling brass supply nut (A), friction ring (B) and cone washer (C) onto 3/8" O.D. straight copper tube. Bead or flare. Wrench tighten.

Dimensions are in Inches

1-800-PFAUCET www.pricepfister.com 19701 DaVinci, Lake Forest, CA 92610 06/18/0

