


- 8P8-WS2-VRISB Finish(B)
- 8P8-WS2-VRISGS Finish(GS)

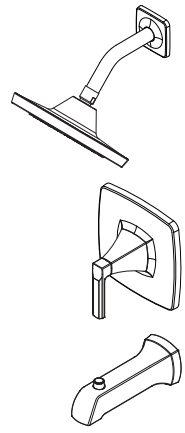

## Specifications

### Features

- 1.75 GPM Flow Rate (Showerhead)
- Raincan Showerhead
- Brass Ball Joint
- Includes OX8 Valve
- Spot Defense™ Finish Resists Spots and Fingerprints (GS Finish Only)
- Wipe Clean Nozzles
- SecurePfit™ with Anti-Handle Wobble
- Temperature Limit Stop
- Quick Connect Tub Spout
- Push Button Diverting Tub Spout
- Pressure Balanced Valve Included
- Pforever Seal Ceramic Disc Valve
- Limited Lifetime Warranty

### Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified to ASME A112.18.1/CSA B125.1 including:
  - ASME A112.18.3 (Backflow Prevention)
  - ASSE 1016
- EPA WaterSense Certified
- CEC Certified/CALGreen compliant
- ADA Compliant - ANSI A117.1 (Lever Handles Only)



## Dimensions

