PFISTER

Lima™

Single Control Kitchen Faucet

F-034-4LMGS Finish*(GS)* ❑

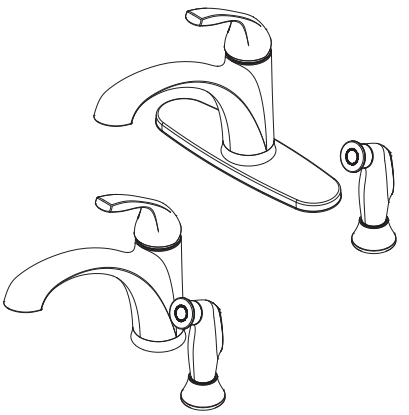

- Spot Defense™
- 1, 2, 3, or 4-Hole Installation
- Pforever Seal

Specifications

Features

- 1.8 GPM Flow Rate
- 1, 2, 3, or 4-Hole Installation; Deck Plate or Single Hole Mounting Option
- High Arc Spout
- Side Spray Included
- Installs With or Without Side Spray
- 360º Swivel Spout
- Mounting Hardware Included
- TiteSeal™ Deck Plate
- Pfast Connect™
- Spot Defense™ Finish Resists Spots and Fingerprints
- Quick Install Tool
- Pforever Seal Ceramic Disc Valve
- Pforever Warranty®

Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified
- CSA B125 Certified
- ASME A112.18.1
- NSF 61/9 Annex G (Low lead)
- Cal Green Compliant
- ADA Compliant-ANSI A117.1 (Lever handles only)
- ASME A112.18.3 (Backflow Prevention)

Dimensions

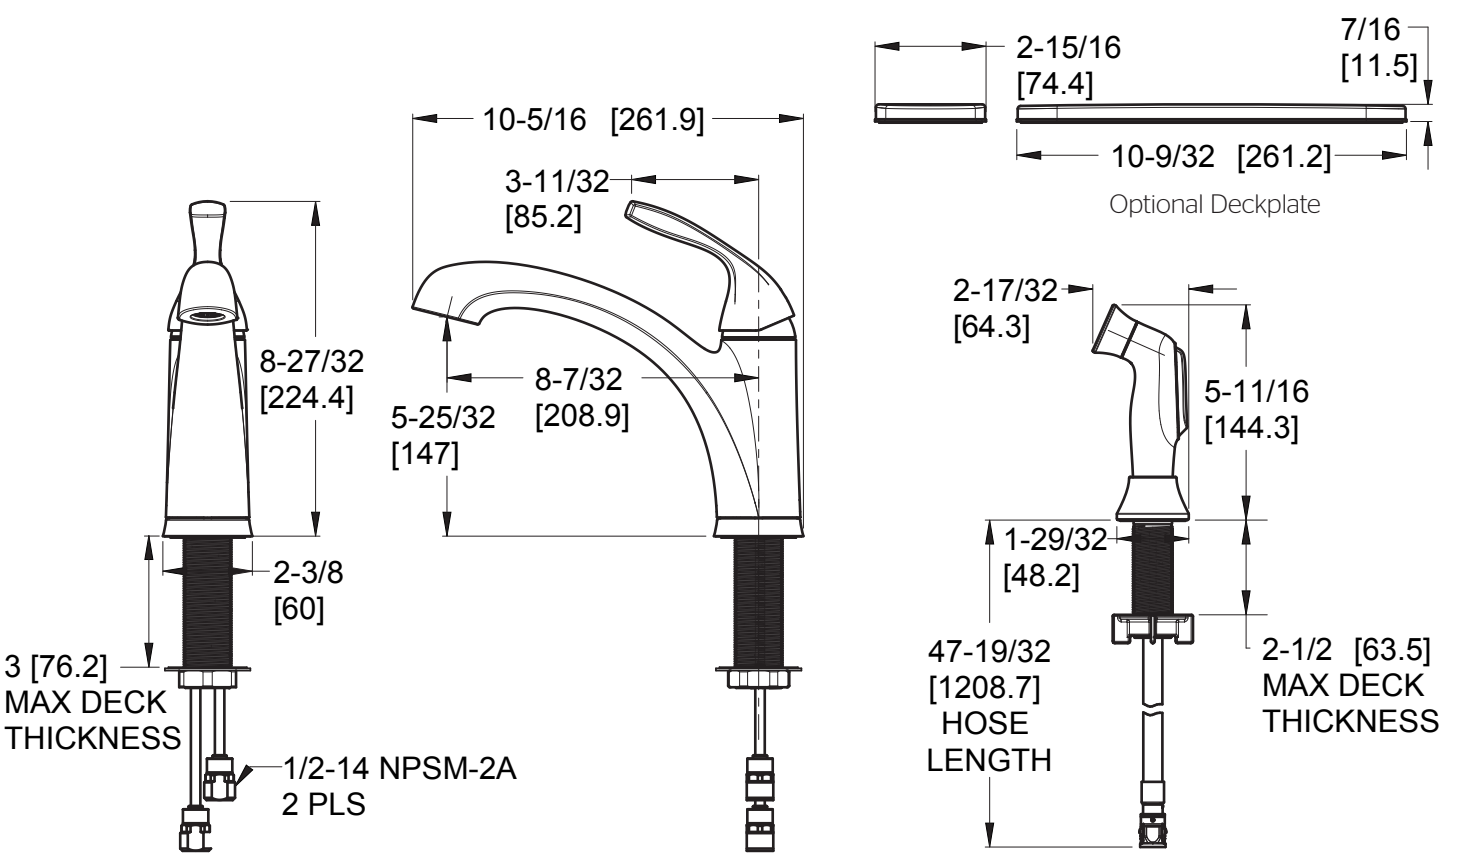

Ø1-3/8 Min to Ø1-1/2 Max. Deck Hole Openings

*supply lines not included
1/2" male OD connection at faucet

Copyright © 2019, Pfister Inc.