


## Talby™ Single Control Kitchen Faucet

- F-034-4TTC Finish(C)
- F-034-4TTGS Finish(GS)

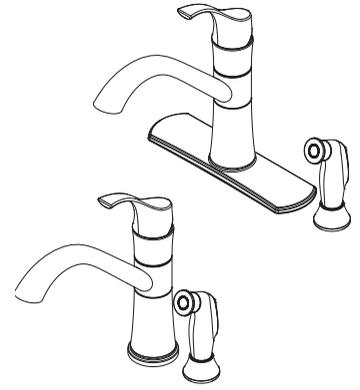

### Specifications

- 3 or 4-Hole Installation
- Pforever Seal
- Tri-Flow™

#### Features

- 1.8 GPM Flow Rate
- 1,2,3 or 4-Hole Installation
- Flex-Line Supply Lines
- High Arc Spout
- Installs With or Without Side Spray
- 360° Swivel Spout
- TiteSeal™ Deck Plate
- Mounting Hardware Included
- Pfast Connect™
- Quick Install Tool
- Pforever Seal Ceramic Disc Valve
- Pforever Warranty®

#### Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified
- CSA B125 Certified
- ASME A112.18.1
- NSF 61/9 Annex G (Low lead)
- Cal Green Compliant
- ADA Compliant-ANSI A117.1 (Lever handles only)
- ASME A112.18.3 (Backflow Prevention)



### Dimensions

