


- F-036-4LRC Finish(C)
- F-036-4LRGS Finish(GS)

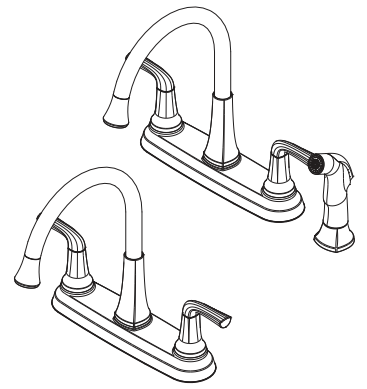

Specifications

Features

- 1.8 GPM Flow Rate
- 3 or 4-Hole Installation
- High Arc Spout
- Installs With or Without Side Spray
- 360° Swivel Spout
- Spot Defense™ Finish Resists Spots and Fingerprints (GS Finish Only)
- PVC Side Spray Hose
- 1/2" Connection Size
- Pfast Connect™
- TiteSeal™ Technology
- Washerless Cartridges
- Pforever Warranty®

Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified
- CSA B125 Certified
- ASME A112.18.1
- NSF 61/9 Annex G (Low lead)
- Cal Green Compliant
- CEC Compliant
- ADA Compliant-ANSI A117.1 (Lever handles only)



Dimensions

