


- F-049-COPC Finish(PC)
- F-049-COKK Finish(KK)
- F-049-COYY Finish(Y)

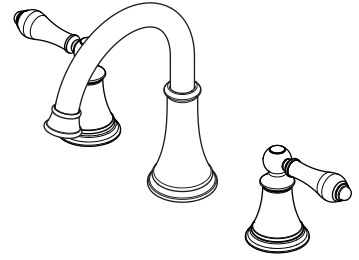

## Specifications

- 3-Hole Installation
- Push & Seal™ Pop-Up

### Features

- 1.5 GPM Flow Rate
- 360° Rotating Spout
- Fixed Hub
- 3-Hole Installation
- High Arc Spout
- Mounting Hardware Included
- Pfaster Connect
- PVD Finish (KK Only)
- Push & Seal™ Pop-Up
- Quick Install Tool
- Pforever Warranty®

### Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified
- CSA B125 Certified
- ASME A112.18.1
- NSF 61/9 Annex G (Low lead)
- Cal Green Compliant
- EPA WaterSense Certification 1.5 gpm, 5.7L/Min
- ADA Compliant-ANSI A117.1 (Lever handles only)



## Dimensions

