

## Specifications

### Features

- 1.5 GPM Flow Rate
- Accommodates Up to 2" Thick Countertops
- Audible Click Connections
- Concealed Screw
- Mounting Hardware Included
- Quick Install Tool Included
- Pfaster Connect™
- Handle Alignment Indicators
- High Arc Spout
- TiteSeal™ Technology
- Fixed Hubs
- PVD Finish (KK Finish Only)
- Color Coded Connections
- Cache Aerator with Tool
- Push & Seal™ Pop-Up
- Pforever Seal™ Ceramic Disc Valves
- Limited Lifetime Warranty


### Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified to ASME A112.18.1/CSA B125.1
- EPA WaterSense Certified
- NSF/ANSI/CAN61:Q≤1
- ADA Compliant - ANSI A117.1 (Lever Handles Only)



## Dimensions

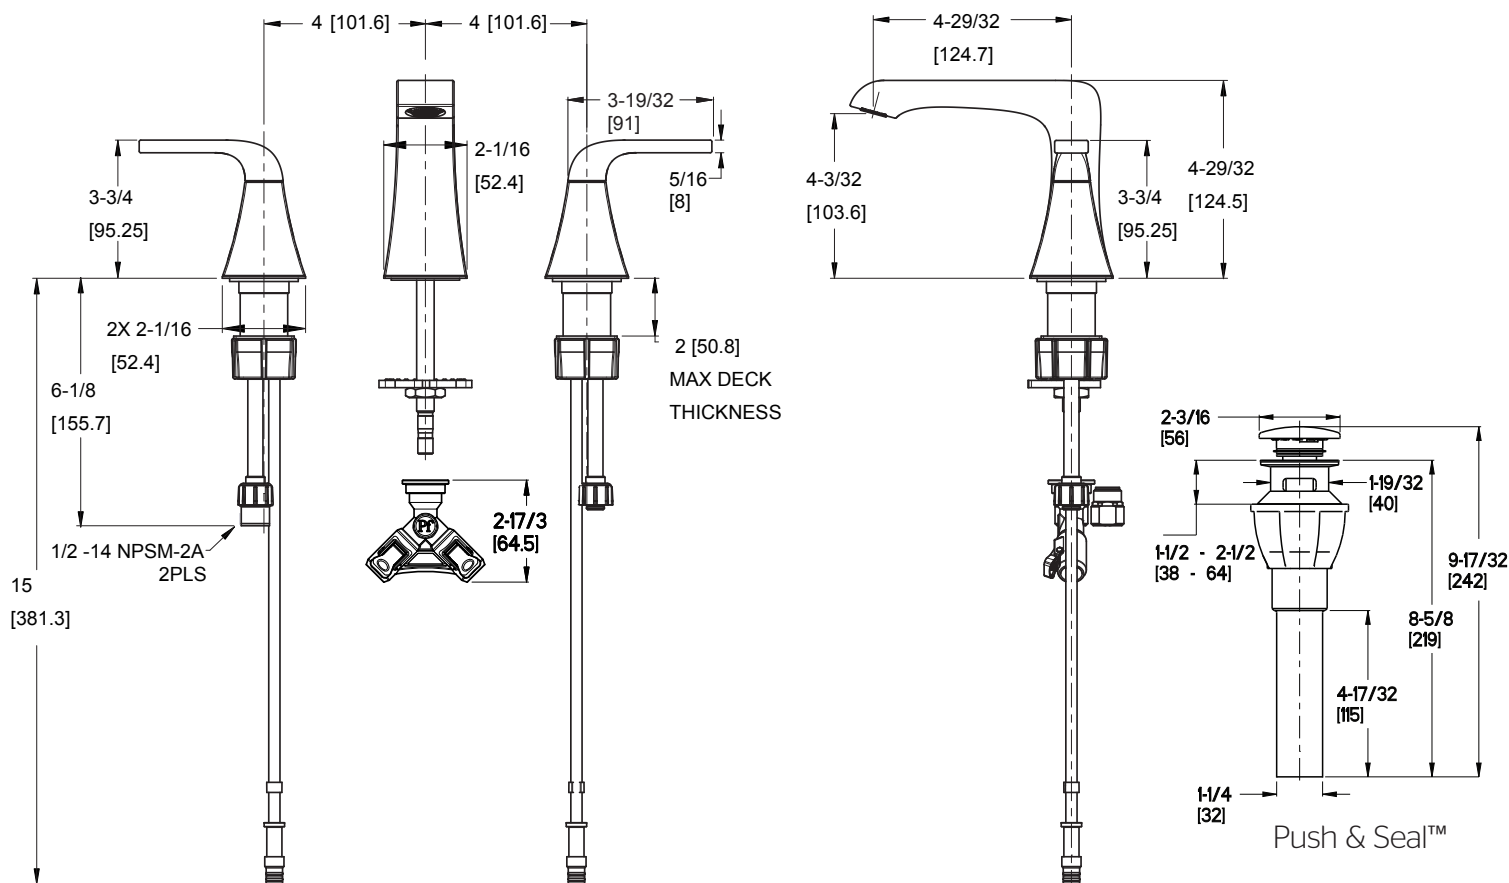

Ø1-1/4 Min to Ø1-1/2 Max. Deck Hole Openings