

Specifications

- AccuDock™ Sprayhead Docking
- 1, 2, 3, or 4-Hole Installation
- Pforever Seal

Features

- 1.8 GPM Flow Rate
- 1, 2, 3, or 4-Hole Installation; Deck Plate or Single Hole Mounting Option
- 2 Function Pull-Out Sprayer
- 360° Rotating Spout
- AccuDock™ Sprayhead Docking
- Forward Handle Operation
- Mounting Hardware Included
- High Arc Swivel Spout
- Pfast Connect™
- SoloTilt™ One-Handed Soap Dispenser Included
- Spot Defense™ Finish Resists Spots and Fingerprints
- Quick Install Tool
- Pforever Seal Ceramic Disc Valve
- Pforever Warranty®


Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified
- CSA B125 Certified
- ASME A112.18.1
- NSF 61/9 Annex G (Low lead)
- CEC Compliant
- Cal Green Compliant
- ADA Compliant-ANSI A117.1 (Lever handles only)
- ASME A112.18.3 (Backflow Prevention)



Dimensions

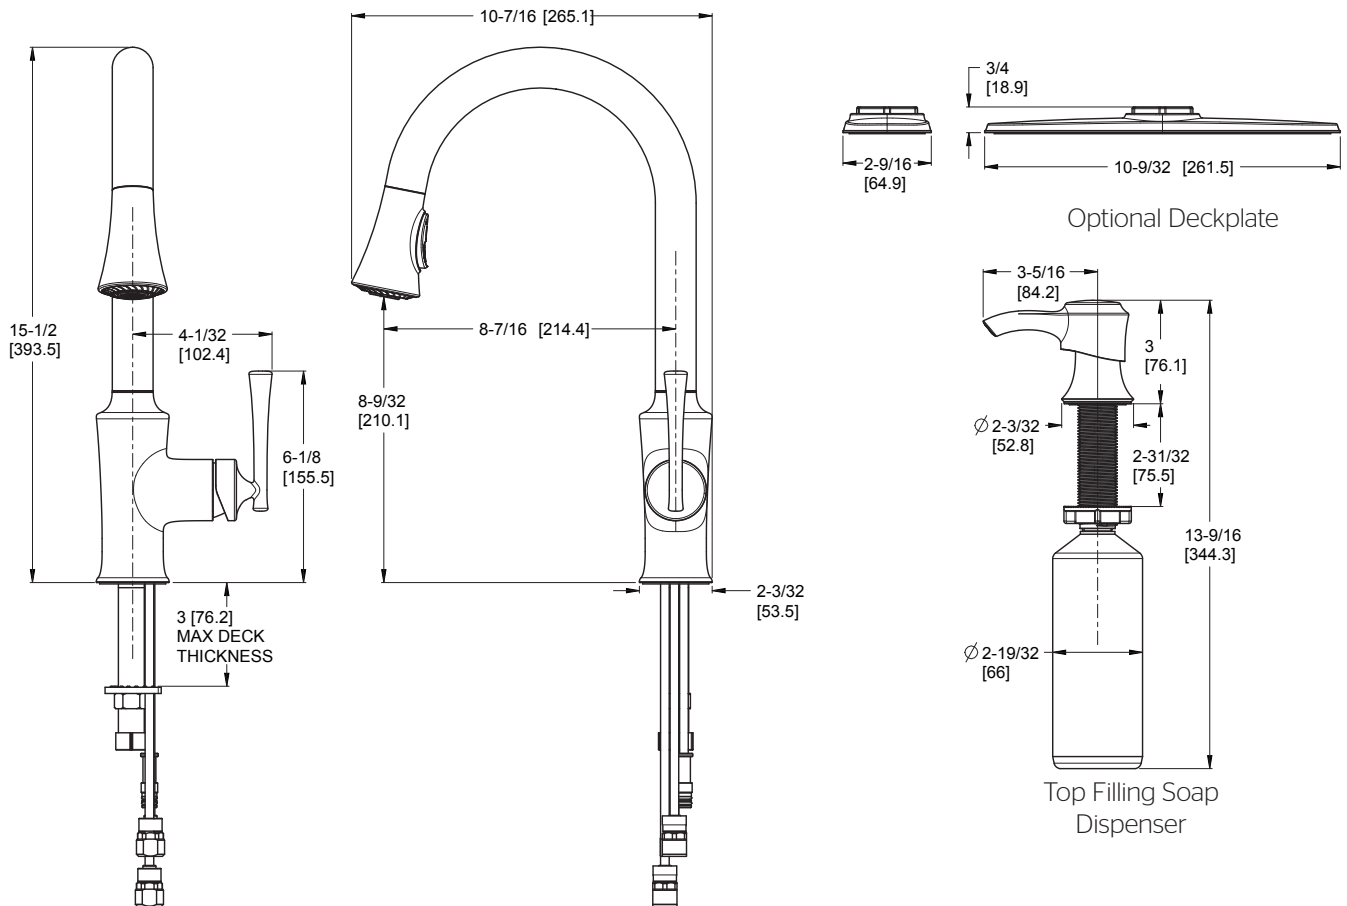

∅1-3/8 Min to ∅1-1/2 Max. Deck Hole Openings

*supply lines not included
1/2" male OD connection at faucet