


- F529-7SVNB Finish(B)
- F529-7SVNC Finish(C)
- F529-7SVNGS Finish(GS)

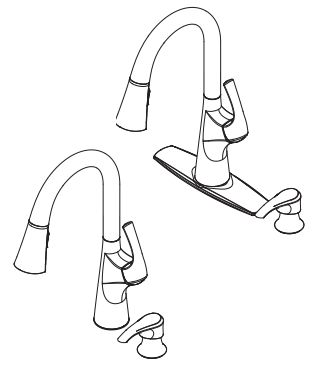

Specifications

- MagnePfit™ With Auto-Align™ Docking
- TopPfit™ Installation

Features

- 1.8 GPM Flow Rate
- TopPfit™ Top Mount Installation
- 1,2,3 or 4-Hole Installation; Deck Plate or Single Hole Mounting Option
- 2 Function Pull-Down Sprayer (Spray and Stream)
- 360° Rotating High Arc Swivel Spout
- MagnePfit™ Sprayhead Docking
- Auto-Align™ Sprayhead Docking
- Spot Defense™ Finish Resists Spots and Fingerprints (GS Finish Only)
- Wipe Clean™ Nozzles
- TopPfit™ Install Tool Included
- 11.5" Pull-Down Hose Length
- Polyethylene Nylon Braided Hose
- 36" Integrated Flexible PERT Supply Lines with 3/8" Connection
- Forward Handle Operation
- SoloTilt™ One-Hand Soap Dispenser Included
- TiteSeal™ Technology
- Pfast Connect™
- Pforever Seal™ Ceramic Disc Valve
- Limited Lifetime Warranty



Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified to ASME A112.18.1/CSA B125.1 including:
 - ASME A112.18.3 (Backflow Prevention)
- NSF/ANSI/CAN61:Q≤1
- CEC Certified/CALGreen compliant
- ADA Compliant - ANSI A117.1 (Lever Handle Only)



Dimensions

