


- \*F529-7VVC Finish(C)
  - F529-7VVGs Finish(Gs)
  - F529-7VVY Finish(Y)
- \*International Only

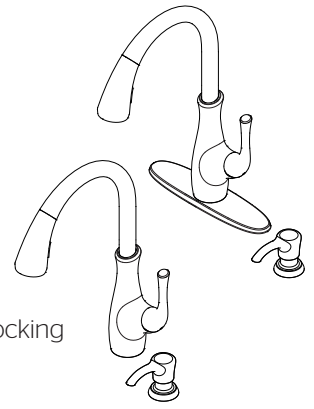


- AccuDock™ Spray Head Docking
- TiteSeal™ Deck Plate
- Spot Defense™

## Specifications

### Features

- 1.8 GPM Flow Rate
- Spot Defense Finish which Resists Spots and Fingerprints (GS Finish Only)
- 1, 2, 3, or 4-Hole Installation; Deck Plate or Single Hole Mounting Option
- 2 Function Pull-Down Sprayer
- 60" Nylon Hose
- AccuDock™ Spray Head Docking
- 360° Rotating Spout
- Mounting Hardware Included
- High Arc Spout
- Concealed Screw
- Flex-Line Supply Lines
- TiteSeal™ Deck Plate
- Quick Install Tool
- Soap Dispenser Included
- Pfast Connect™
- Pforever Seal™ Ceramic Disc Valve
- Limited Lifetime Warranty

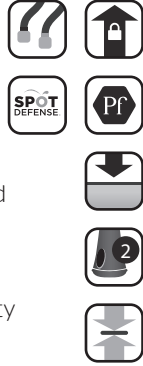

### Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified to ASME A112.18.1/CSA B125.1 including:
  - ASME A112.18.3 (Backflow Prevention)
- NSF/ANSI/CAN61:Q≤1
- CEC Certified/CALGreen compliant
- ADA Compliant - ANSI A117.1 (Lever Handle Only)



## Dimensions

