


### Pull-Down Kitchen Faucet

- \*F529-7VVC Finish(C)
- F529-7VVGGS Finish(GS)
- F529-7VVY Finish(Y)
- \*International Only

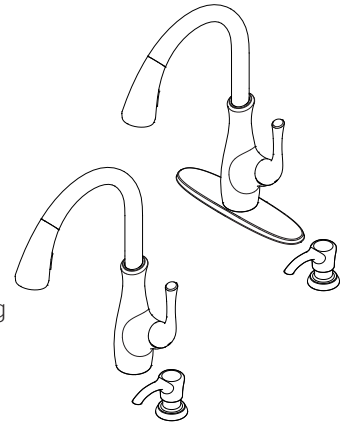

- AccuDock™ Spray Head Docking
- TiteSeal™ Deck Plate
- Spot Defense
- Pforever Seal

## Specifications

### Features

- 1.8 GPM Flow Rate
- Spot Defense Finish which Resists Spots and Fingerprints (GS Finish Only)
- 1, 2, 3, or 4-Hole Installation; Deck Plate or Single Hole Mounting Option
- 2 Function Pull-Down Sprayer
- 60" Nylon Hose
- AccuDock™ Spray Head Docking
- 360° Rotating Spout
- Mounting Hardware Included
- High Arc Spout
- Concealed Screw
- Flex-Line Supply Lines
- TiteSeal™ Deck Plate
- Quick Install Tool
- Soap Dispenser Included
- Pfast Connect
- Pforever Seal Ceramic Disc Valve
- Pforever Warranty®


### Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified
- CSA B125 Certified
- ASME A112.18.1
- NSF 61/9 Annex G (Low lead)
- Cal Green Compliant
- ADA Compliant-ANSI A117.1 (Lever handles only)
- ASME A112.18.3 (Backflow Prevention)




## Dimensions

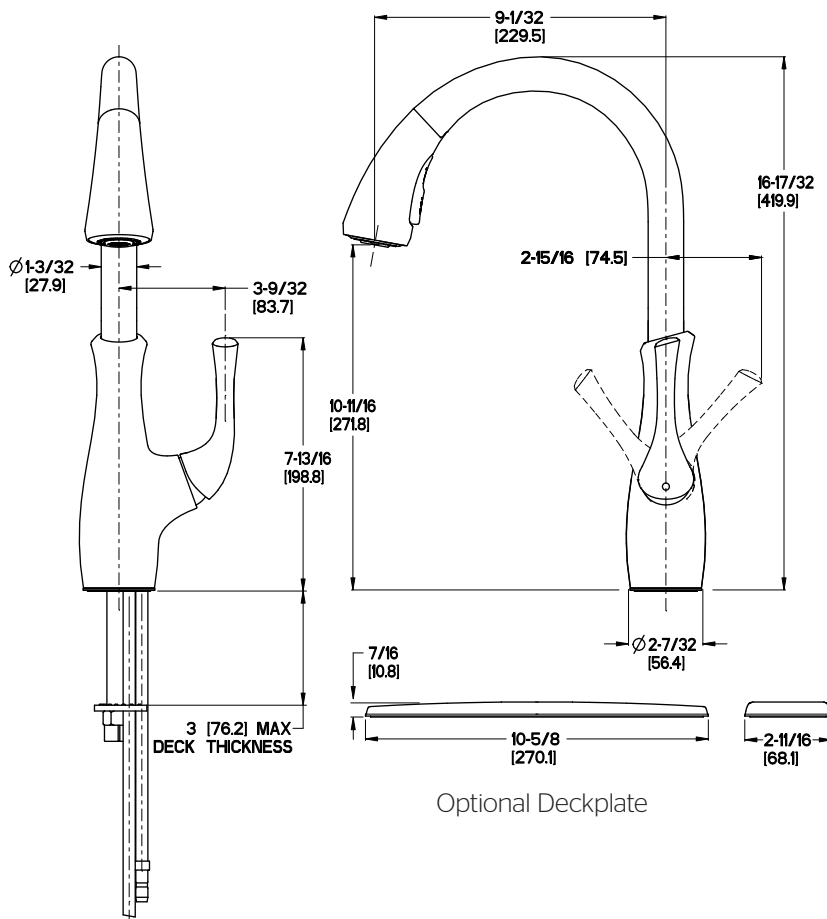

Ø1-3/8 Min to Ø1-1/2 Max. Deck Hole Openings

### Top Filling Soap Dispenser

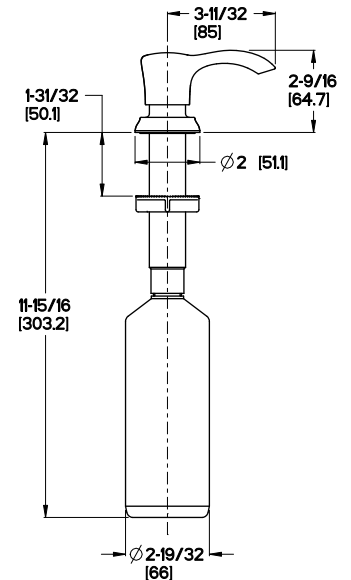

36 Inch Supply Lines with 3/8 Female Compression Brass Connections

