

## Specifications


### Features

- 1.8 GPM Flow Rate
- 3/8" Female Connection
- 18" Extended Hose
- 2 Function Pull-Down Sprayer
- AccuDock Spray Head Docking
- React™ Touch-Free Technology
- Hibernate
- Flex-Line Supply Lines
- PVD Finish
- Soap Dispenser Included
- Smart Stop
- EZ Clean™
- Temp Adjust
- Low Battery Indicator
- Manual Override
- Handle Forward Design
- TiteSeal™ Deck Plate
- Quick Install Tool
- Pfast Connect
- Pforever Seal Ceramic Disc Valve
- Pforever Warranty®


### Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified
- CSA B125 Certified
- ASME A112.18.1
- NSF 61/9 Annex G (Low lead)
- Cal Green Compliant
- ADA Compliant-ANSI A117.1 (Lever handles only)

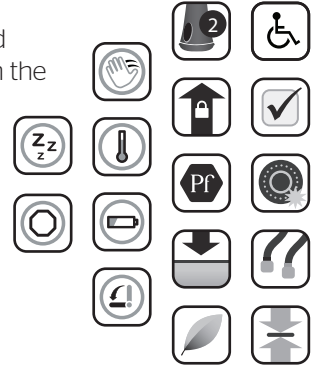

## Dimensions

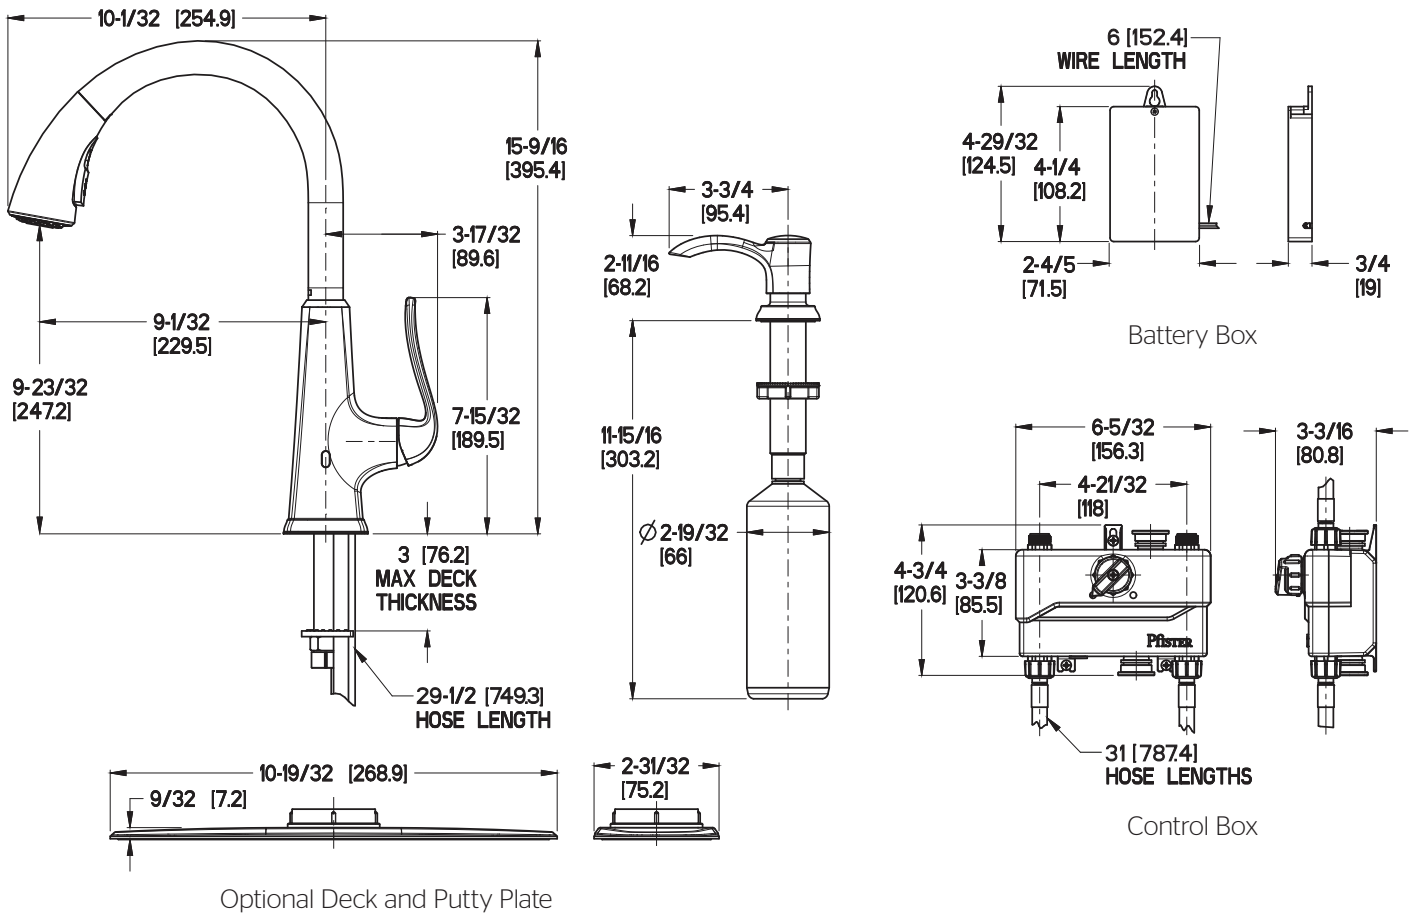

Ø1-3/8 Min to Ø1-1/2 Max. Deck Hole Openings