


FWKP-400B Finish(MB)

F529-7CGS Finish(S)

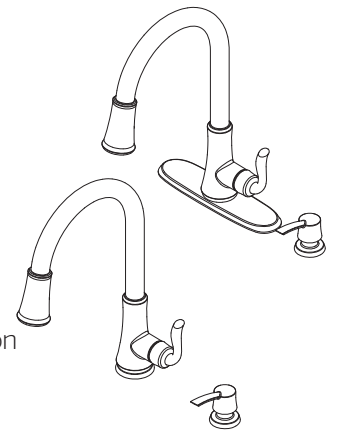

- 1, 2, 3, or 4-Hole Installation
- Single Control
- Pforever Seal™

## Specifications

### Features

- 1.8 GPM Flow Rate
- 1, 2, 3, or 4-Hole Installation; Deck Plate or Single Hole Mounting Option
- 3 Function Pull-Down Sprayer
- Mounting Hardware Included
- Mounting Posts
- High Arc Spout
- 360° Rotating Spout
- Swivel Spout
- Soap Dispenser Included
- Pfast Connect™
- PVD Finish (SS Only)
- Quick Install Tool
- Pforever Seal™ Ceramic Disc Valve
- Limited Lifetime Warranty



### Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified to ASME A112.18.1/CSA B125.1 including:
  - ASME A112.18.3 (Backflow Prevention)
- NSF/ANSI/CAN61:Q≤1
- CEC Certified/CALGreen compliant
- ADA Compliant - ANSI A117.1 (Lever Handles Only)



## Dimensions

