


- G16-3FWC Finish(C)
- G16-3FWK Finish(K)
- G16-3FWD Finish(D)
- G16-3FWY Finish(Y)

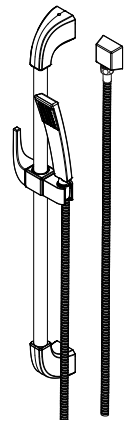

Specifications

Features

- 2.0 GPM Flow Rate
- Meets LEED Requirements of 1.5 with 941-055
- 60" Metal Hose
- EZ Clean™
- Adjustable Heights Handheld
- All Metal Construction
- Includes Back Flow Prevention System
- Pforever Warranty®

- All Metal Construction
- Pforever Warranty®

Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified
- CSA B125 Certified
- ASME A112.18.1 Certified Check Valves
- ADA Compliant-ANSI A117.1 (Lever handles only)
- CEC Compliant
- EPA WaterSense Certification 2.0 gpm, 7.8 L/Min



Dimensions

