


## Pfirst Series™ Pull Down Kitchen Faucet

- G529-PFCC Finish(CC)
- G529-PFSS Finish(SS)
- G529-PFYY Finish(YY)

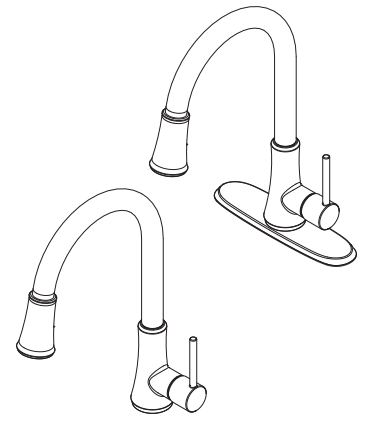

### Specifications

- 1 or 3-Hole Installation
- 360° Rotating Spout

### Features

- 1.75 GPM Flow Rate
- 1.5 GPM with insert 941-786
- 1 or 3-Hole Installation; Deck Plate or Single Hole Mounting Option
- 2 Function Pull-Down Sprayer
- 360° Rotating Spout
- Pfast Connect
- Pforever Warranty®


### Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified
- CSA B125 Certified
- ASME A112.18.1
- NSF 61/9 Annex G (Low lead)
- Cal Green Compliant
- ADA Compliant-ANSI A117.1 (Lever handles only)



### Dimensions

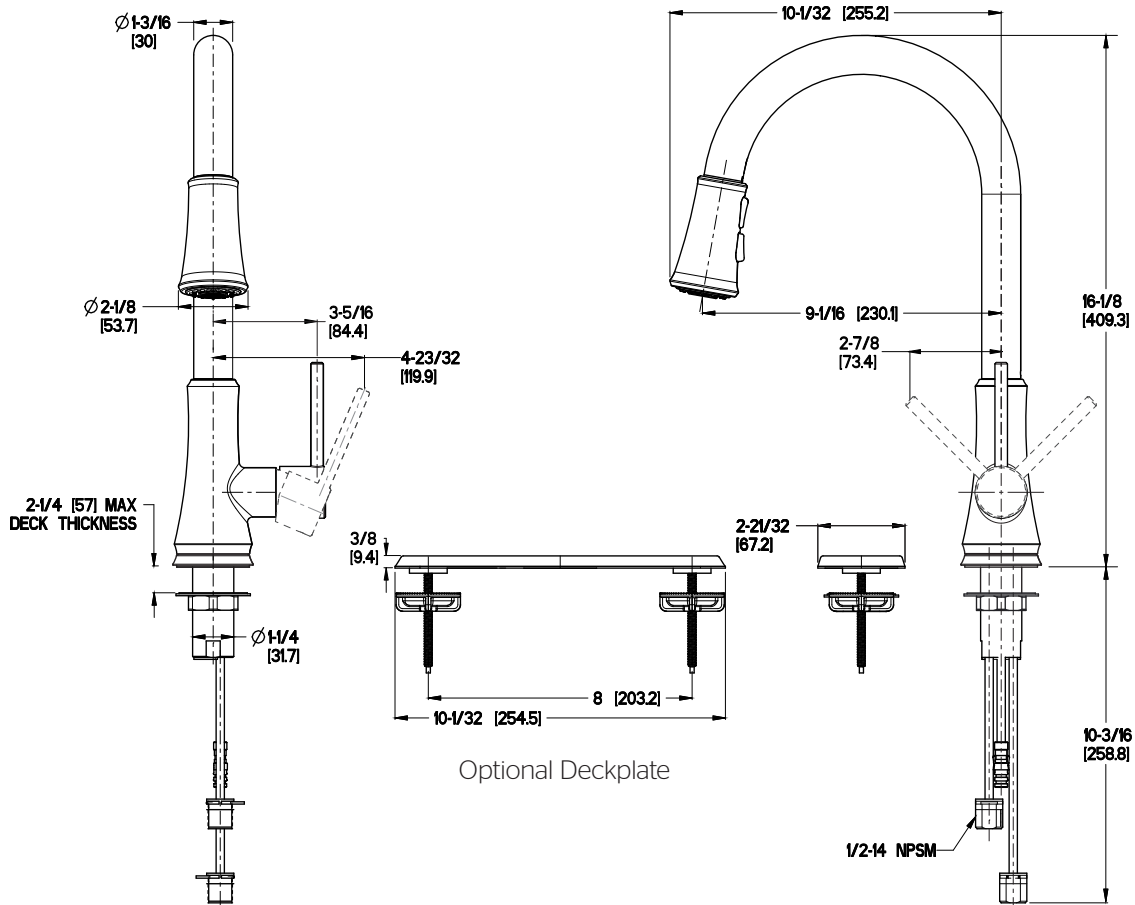

Ø1-3/8 Min to Ø1-1/2 Max. Deck Hole Openings