


GT42-SR1C Finish(C) ☐

GT42-SR1K Finish(K) ☐

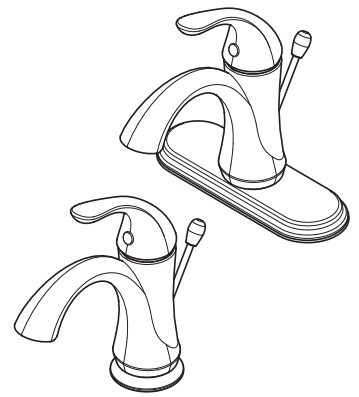

## Specifications

### Features

- 1.5 GPM Flow Rate
- 1 or 3-Hole Installation; Deck Plate or Single Hole Mounting Option
- All Metal Construction
- Concealed Screw
- TiteSeal™ Deckplate
- Mounting Posts Included
- Mounting Hardware Included
- Nylon Flex-Line Supply Lines
- Optional Deckplate
- PVD Finish (K Finish Only)
- 50/50 Pop-Up Drain
- Pforever Warranty®


### Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified
- CSA B125 Certified
- ASME A112.18.1
- NSF 61/9 Annex G (Low lead)
- EPA WaterSense Certification 1.5 gpm, 5.7L/Min
- ADA Compliant-ANSI A117.1 (Lever handles only)



## Dimensions

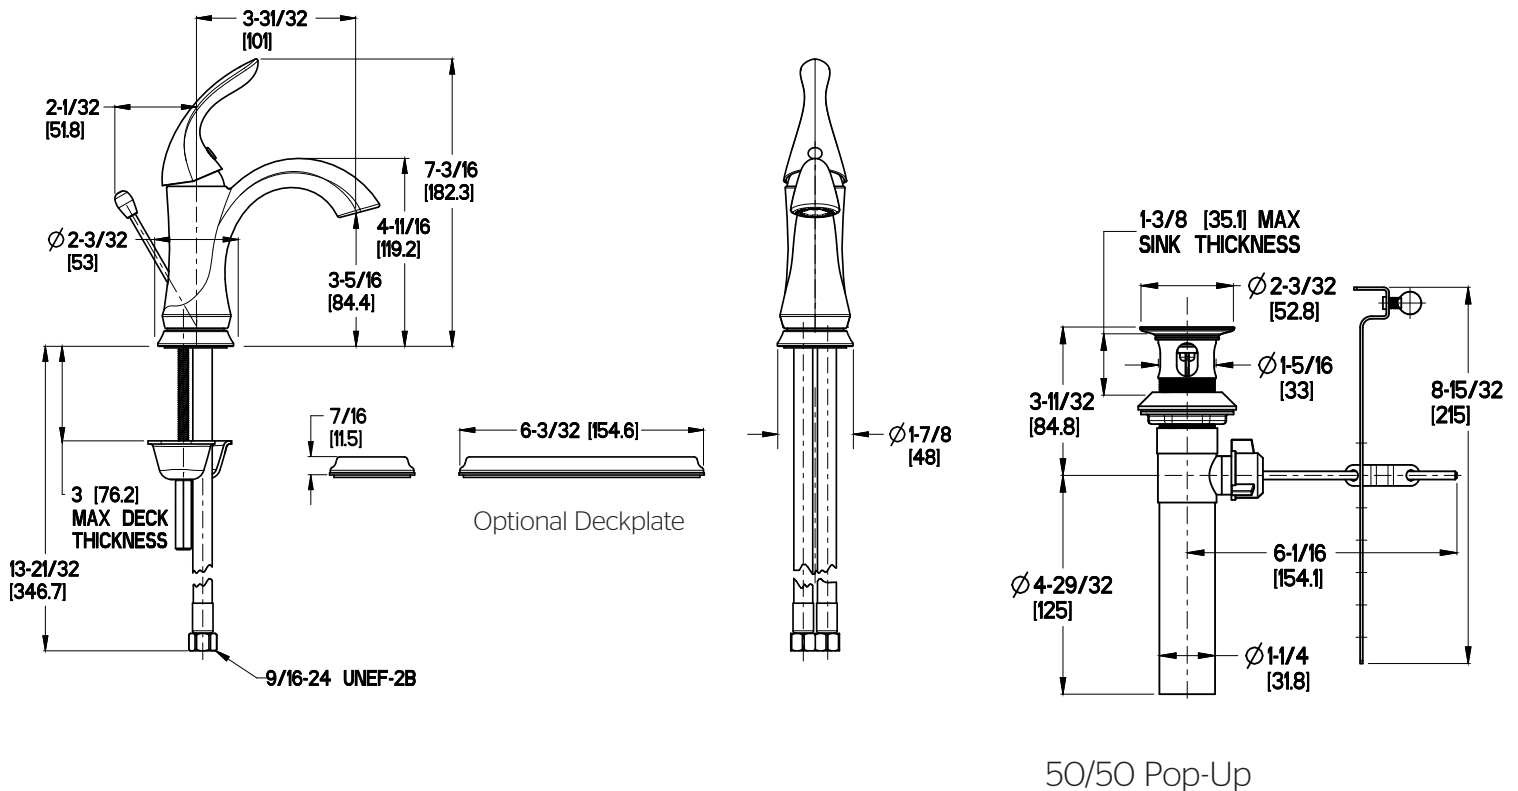

$\phi$ 1 Min to  $\phi$ 1-1/2 Max. Deck Hole Openings