


Hanover™ Pull-Down Kitchen Faucet

- GT526-TMC Finish(C)
- GT526-TMS Finish(S)
- GT526-TMY Finish(Y)

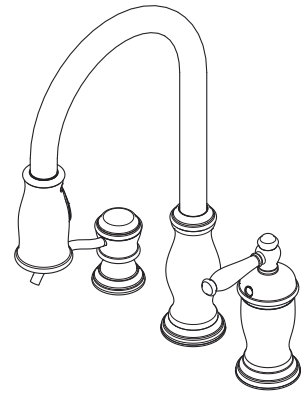

- Adjustable Spray Volume
- 2 or 3-Hole Installation
- Pforever Seal

Specifications

Features

- 1.8 GPM Flow Rate
- 2 or 3-Hole Installation
- 360° Rotating Spout
- 75" Hose
- Quick Connect
- High Arc Spout
- Soap/Lotion Dispenser Optional
- Adjustable Spray Volume

- Flexible Braided Stainless Steel Supply Lines
- Pforever Seal Ceramic Disc Valve
- Pforever Warranty®


Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified
- CSA B125 Certified
- ASME A112.18.1
- NSF 61/9 Annex G (Low lead)
- Cal Green Compliant
- ADA Compliant-ANSI A117.1 (Lever handles only)
- ASME A112.18.3 (Backflow Prevention)



Dimensions

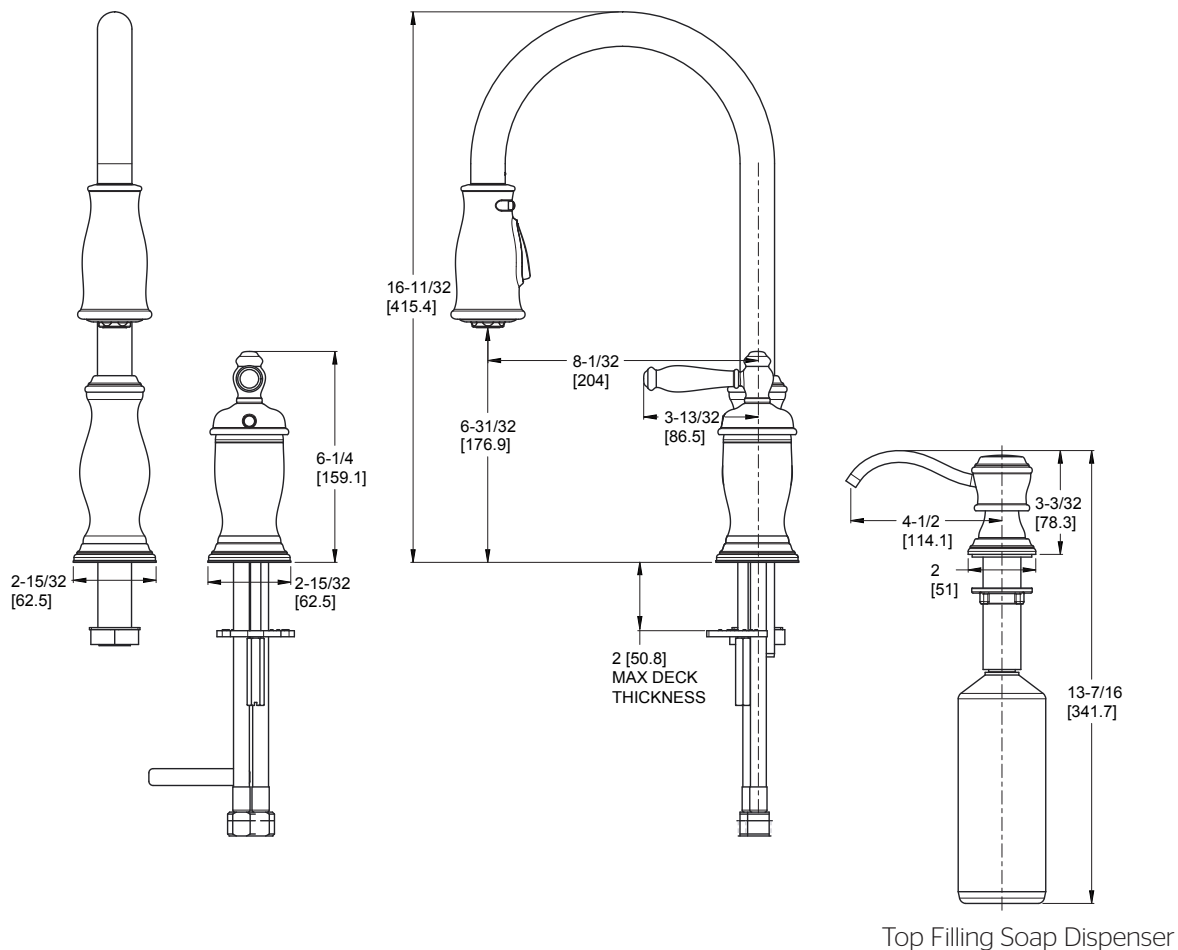

Ø1-3/8 Min to Ø1-1/2 Max. Deck Hole Openings

Top Filling Soap Dispenser