


- GT529-ALB Finish(B)
- GT529-ALC Finish(C)
- GT529-ALD Finish(D)
- GT529-ALS Finish(S)

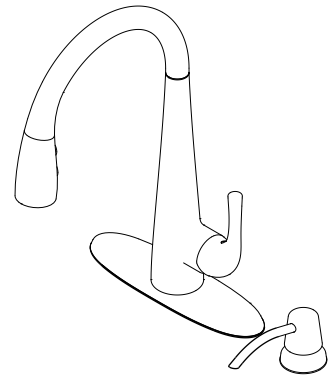

Specifications

- Lever Handle
- 1, 2, 3 or 4-Hole Installation
- Pforever Seal

Features

- 1.8 GPM Flow Rate
- 1, 2, 3, or 4-Hole Installation; Deck Plate or Single Hole Mounting Option
- 3 Function Pull-Down Sprayer
- Soap/Lotion Dispenser Optional
- Self Cleaning Spray Head
- Pforever Seal Ceramic Disc Valve
- Pforever Warranty®

Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified
- CSA B125 Certified
- ASME A112.18.1
- NSF 61/9 Annex G (Low lead)
- CEC Compliant
- Cal Green Compliant
- ADA Compliant-ANSI A117.1 (Lever handles only)
- ASME A112.18.3 (Backflow Prevention)



Dimensions

