


### Pull Down Kitchen Faucet

- GT529-IHC Finish(C)
- GT529-IHB Finish(B)
- GT529-IHS Finish(S)

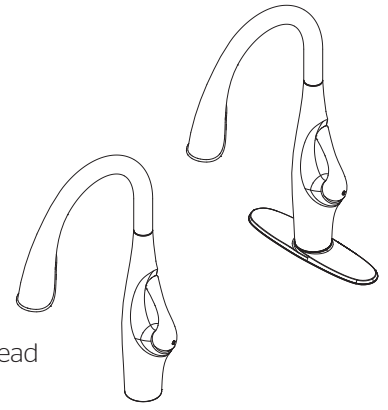

- Concealed Sprayhead
- Pforever Seal™

## Specifications

### Features

- 1.8 GPM Flow Rate
- 3 Function Pull-Down Sprayer (Pause, Spray, Stream)
- 68" Hose
- 36" Integrated Nylon Supply Lines with 3/8" Connection
- Concealed Sprayhead
- High Arc Spout
- Optional Soap Dispenser, Order KSD-IH\* Separately
- Optional Deckplate, Order 961-193\* (For Black or Stainless Steel) or 961-208A (For Chrome) Separately
- Pforever Seal™ Ceramic Disc Valve
- Limited Lifetime Warranty




### Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified to ASME A112.18.1/CSA B125.1 including:
  - ASME A112.18.3 (Backflow Prevention)
- NSF/ANSI/CAN61:Q≤1
- CEC Certified/CALGreen compliant
- ADA Compliant - ANSI A117.1 (Lever Handle Only)




## Dimensions

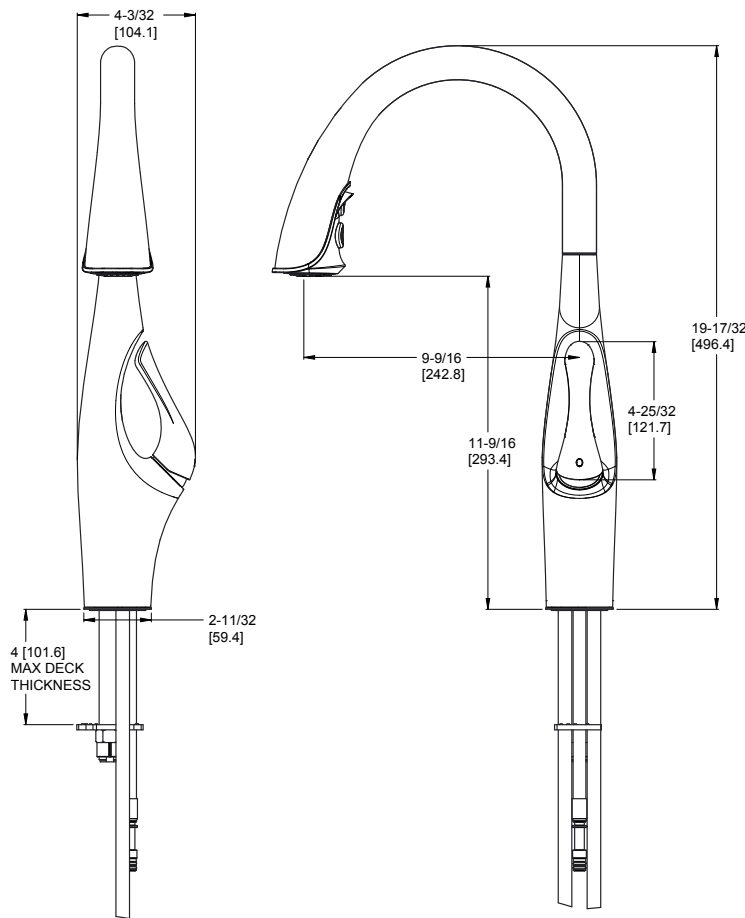

Ø1-3/8 Min to Ø1-1/2 Max. Deck Hole Openings

### Optional Deckplate

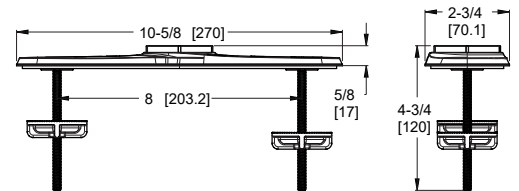

### 36 Inch Supply Lines with 3/8 Female Compression Brass Connections

