


### Pull Down Kitchen Faucet

- GT529-IHC Finish(C)
- GT529-IHB Finish(B)
- GT529-IHS Finish(S)

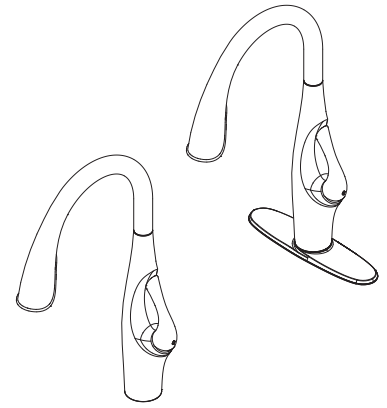

## Specifications

### Features

- 1.8 GPM Flow Rate
- 3 Function Pull-Down Sprayer (Pause, Spray, Stream)
- 68" Hose
- 36" Integrated Nylon Supply Lines with 3/8" Connection
- Concealed Sprayhead
- High Arc Spout
- Optional Soap Dispenser, Order KSD-IH\* Separately
- Optional Deckplate, Order 961-193\* (For Black or Stainless Steel) or 961-208A (For Chrome) Separately
- Pforever Seal Ceramic Disc Valve
- Pforever Warranty®

### Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified to ASME A112.18.1/CSA B125
- Certified to NSF 61/9 Annex G (Low lead)
- CEC Compliant
- Cal Green Compliant
- ADA Compliant-ANSI A117.1 (Lever handles only)
- ASME A112.18.3 (Backflow Prevention)



## Dimensions

