PFISTER
FAUCETS

Verve™

Pull-Down Kitchen Faucet

GT529-VRVBG Finish*(BG)* ❑
GT529-VRVC Finish*(C)* ❑
GT529-VRVD Finish*(D)* ❑
GT529-VRVGM Finish*(GM)* ❑
GT529-VRVGS Finish*(GS)* ❑
GT529-VRVSDB Finish*(SDB)* ❑



- Magnetic Spray Head
- Forward Handle Operation
- Pforever Seal™

Specifications

Features

- 1.8 GPM Flow Rate
- 14" Extended Hose Length
- 360º Rotating Spout
- 2 Function Pull-Down Sprayer (Spray and Stream)
- Magnetic Spray Head Docking
- Nylon Braided Hose
- Nylon Flex-Line Supply Lines
- Forward Handle Operation
- Pfast Connect™
- TiteSeal™ Technology
- Optional Handles Available: Order HHL-GTVRV* Seperately
- Pforever Seal™ Ceramic Disc Valve
- Limited Lifetime Warranty

Product Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified to ASME A112.18.1/CSA B125.1 including:
  - ASME A112.18.3 (Backflow Prevention)
- NSF/ANSI/CAN61:Q≤1
- CEC Certified/CALGreen compliant
- ADA Compliant – ANSI A117.1 (Lever Handle Only)

Dimensions

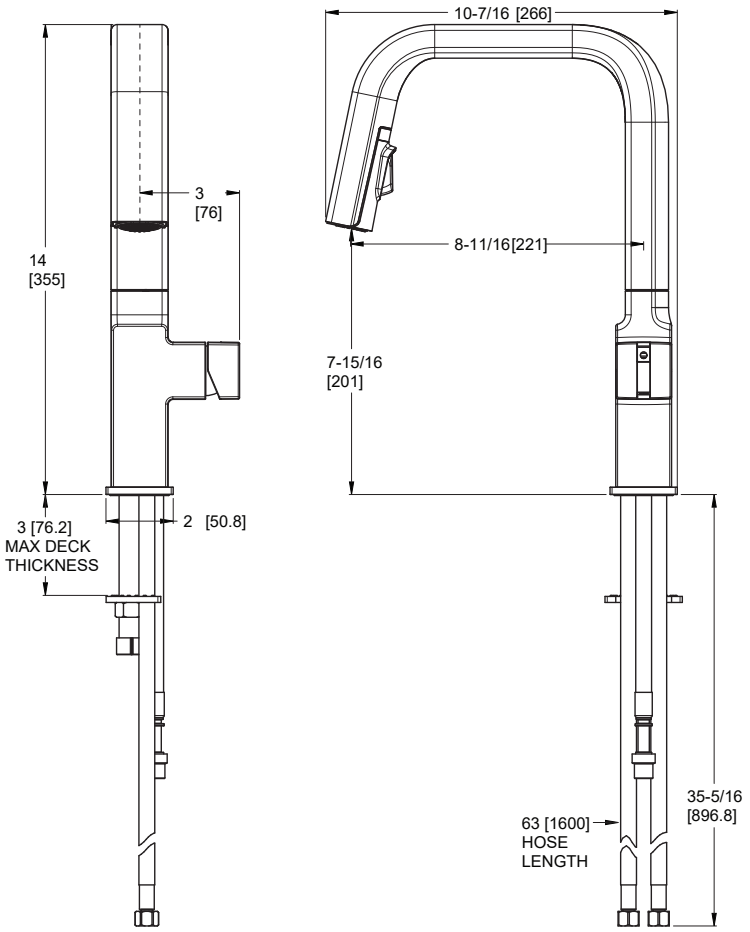

Ø1-3/8 Min to Ø1-1/2 Max. Deck Hole Openings

Copyright © 2026, Pfister Inc.