

- GT572-MTB Finish(B)
- GT572-MTC Finish(C)
- GT572-MTD Finish(D)
- GT572-MTS Finish(S)
- GT572-MTBG Finish(BG)

Specifications

- Auto-Align™ Magnetic Spray Head
- Pforever Seal™

Features

- 1.8 GPM Flow Rate
- 14" Extended Hose Length
- 360° Rotating Spout
- 3 Function Pull-Down Sprayer (Spray, Stream, and Pause)
- Auto-Align™ Magnetic Spray Head Docking
- 3/8" Connection
- Nylon Braided Hose
- Nylon Flex-Line Supply Lines
- Forward Handle Operation
- Pfast Connect™
- TiteSeal™ Technology
- Optional Deckplate Available, Order 961-258* Separately
- Pforever Seal™ Ceramic Disc Valve
- Limited Lifetime Warranty




Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified to ASME A112.18.1/CSA B125.1 including:
 - ASME A112.18.3 (Backflow Prevention)
- NSF/ANSI/CAN61:Q≤1
- CEC Certified/CALGreen compliant
- ADA Compliant - ANSI A117.1 (Lever Handles Only)



Dimensions

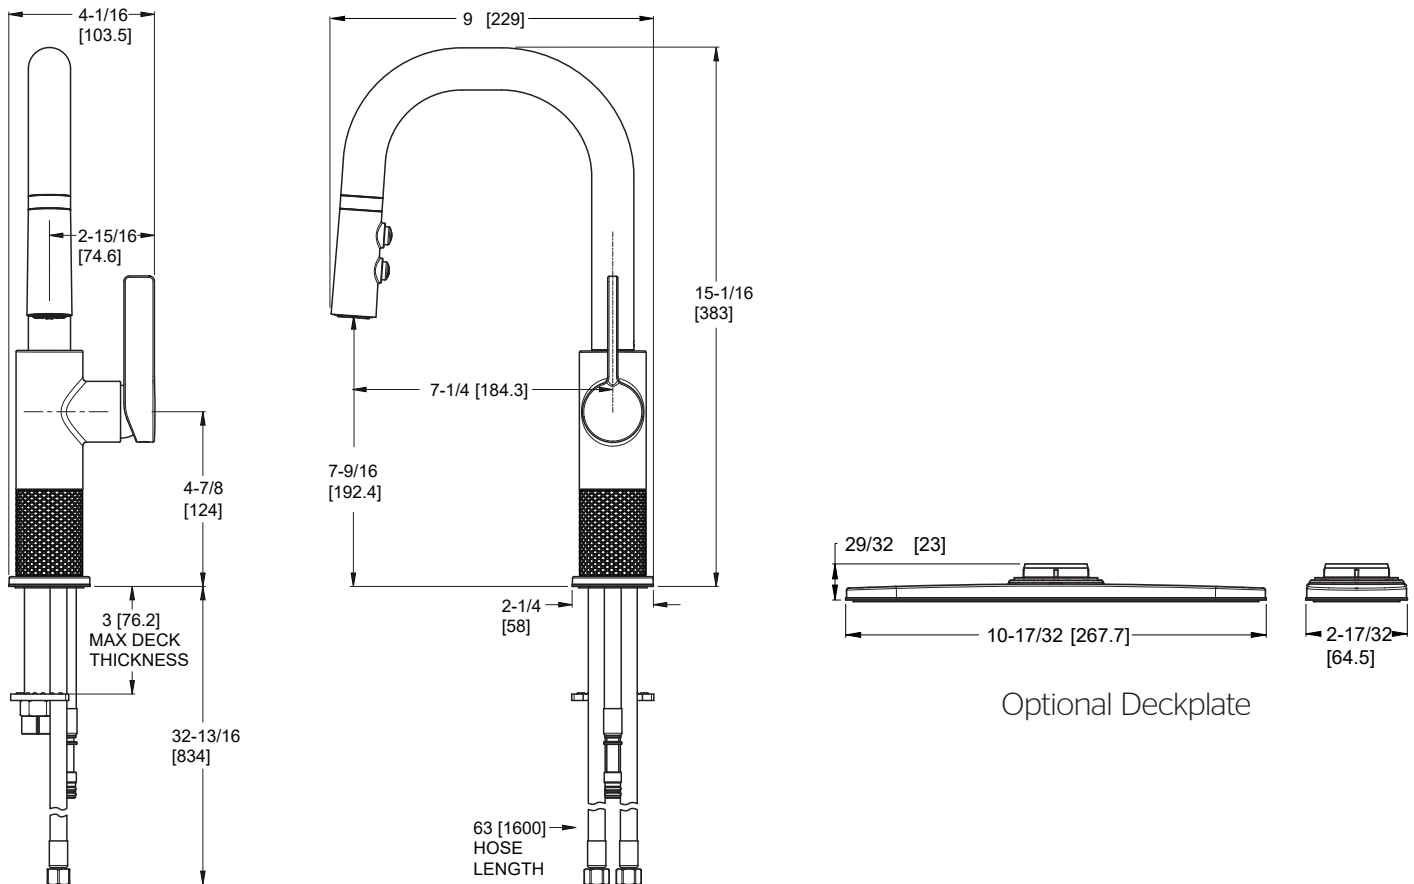

Ø1-3/8 Min to Ø1-1/2 Max. Deck Hole Openings

Optional Deckplate