


- GT72-ALBB Finish(BB)
- GT72-ALCC Finish(CC)
- GT72-ALDD Finish(DD)
- GT72-ALSS Finish(SS)

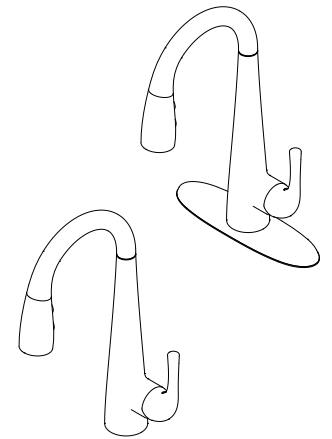

Specifications

- Lever Handle
- 1, 2, or 3-Hole Installation
- Pforever Seal

Features

- 1.8 GPM Flow Rate
- 1, 2, or 3-Hole Installation; Deck Plate or Single Hole Mounting Option
- Self Cleaning Spray Head
- 3 Function Pull-Down Sprayer
- Pforever Seal Ceramic Disc Valve
- Pforever Warranty®

Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified
- CSA B125 Certified
- ASME A112.18.1
- NSF 61/9 Annex G (Low lead)
- CEC Compliant
- Cal Green Compliant
- ADA Compliant-ANSI A117.1 (Lever handles only)
- ASME A112.18.3 (Backflow Prevention)



Dimensions

