


Single Control Lavatory Faucet

- LF-O42-BLOB Finish(B) ☐
- LF-O42-BLOC Finish(C) ☐
- LF-O42-BLOGG Finish(BG) ☐
- LF-O42-BLOGS Finish(GS) ☐

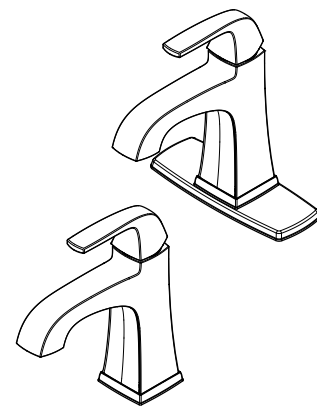

- 1 or 3-Hole Installation
- Pforever Seal
- Push & Seal™ Pop-Up

Specifications

Features

- 1.2 GPM Flow Rate
- Spot Defense™ Finish Resists Spots and Fingerprints (GS Finish Only)
- Mounting Hardware Included
- 1 or 3-Hole Installation; Deck Plate or Single Hole Mounting Option
- TiteSeal™ Deckplate
- Push & Seal™ Pop-Up
- Pforever Seal™ Ceramic Disc Valve
- Limited Lifetime Warranty




Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified to ASME A112.18.1/CSA B125.1
- EPA WaterSense Certified
- NSF/ANSI/CAN61:Q≤1
- CEC Certified/CALGreen compliant
- ADA Compliant - ANSI A117.1 (Lever Handle Only)




Dimensions

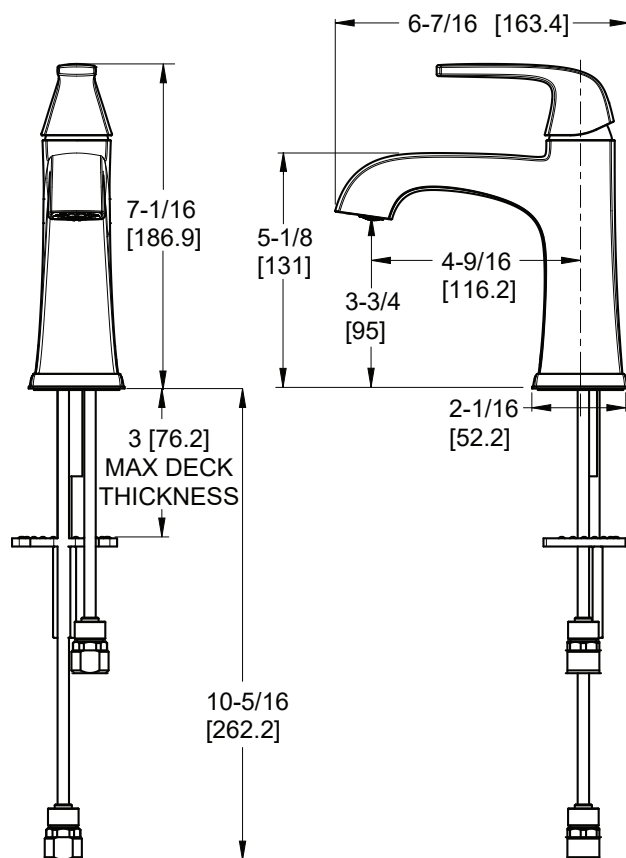

Ø1 Min to Ø1-1/2 Max. Deck Hole Openings

Optional Deck and Putty Plate

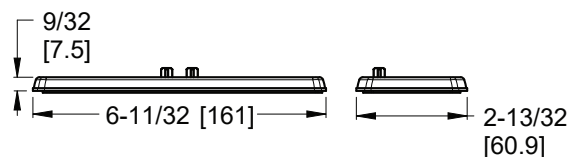

Push & Seal™

