
Pfister

Capistrano™

Single Control Lavatory Faucet

- LF-O42-CSOBBG Finish(BBG) □
 - LF-O42-CSOBG Finish(BG) □
- LF-O42-CSOSDB Finish(SDB) □
 - LF-042-CSOGS Finish(GS)



Specifications

All Metal Construction

1 or 3-Hole Installation

Pforever Seal™

Features

- 1.2 GPM Flow Rate
- All Metal Construction
- 1 or 3-Hole Installation
- Optional Deckplate Included
- Push & Seal™ Drain Included
- Spot Defense™ Finish Resists Spots and Fingerprints (GS and SDB Only)
- Mounting Hardware Included
- Pfast Connect™ Supply Lines
- TiteSeal[™] Deckplate
- Pforever Seal[™] Ceramic Disc Valve
- Limited Lifetime Warranty



Code Compliance


Pfister products are designed and manufactured in compliance with the following standards and codes:





- IAPMO Certified to ASME A112.18.1/CSA B125.1
- EPA WaterSense Certified
- NSF/ANSI/CAN61:O<1
- CEC Certified/CALGreen compliant
- ADA Compliant ANSI A117.1 (Lever Handles Only)



Dimensions

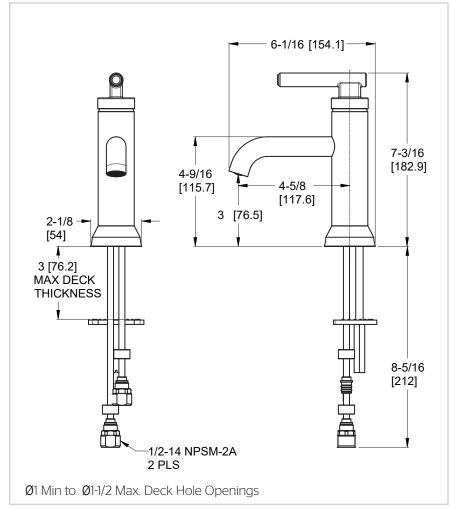





SS-LF042-CSOX