


LF-049-CRKK Finish(KK)

LF-049-CRYY Finish(YY)

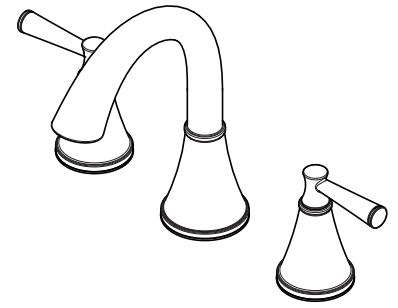

## Specifications

- 3-Hole Installation
- Push & Seal™ Pop-Up
- Pforever Seal

### Features

- 1.2 GPM Flow Rate
- 3-Hole Installation
- High Arc Spout
- Fixed Hubs
- Quick Install Tool
- Push & Seal™ Pop-Up
- TiteSeal™ Deck Plate
- Pforever Seal Ceramic Disc Valves
- Pforever Warranty®

### Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified
- CSA B125 Certified
- ASME A112.18.1
- NSF 61/9 Annex G (Low lead)
- Cal Green Compliant
- CEC Compliant
- EPA WaterSense Certification 1.2 gpm, 4.5 L/Min
- ADA Compliant-ANSI A117.1 (Lever handles only)



## Dimensions

