

- | | |
|--|--|
| LF-049-EOBC Finish(C) <input type="checkbox"/> | LF-049-EOBV Finish(V) <input type="checkbox"/> |
| LF-049-EOBK Finish(K) <input type="checkbox"/> | LF-049-EPBK Finish(K) <input type="checkbox"/> |
| LF-049-EOBY Finish(Y) <input type="checkbox"/> | |

Specifications

Features

- 1.2 GPM Flow Rate
- Adjustable Install
- High Arc Spout
- Quick Install Tool
- Mounting Hardware Included
- Mounting Posts Included
- Pfast Connect
- Push & Seal™ Pop-Up
- Pforever Seal Ceramic Disc Valves
- Pforever Warranty®

- 3-Hole Installation
- Push & Seal™ Pop-Up
- Pforever Seal


Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified
- CSA B125 Certified
- ASME A112.18.1
- NSF 61/9 Annex G (Low lead)
- Cal Green Compliant
- CEC Compliant
- EPA WaterSense Certification 1.2 gpm, 4.5 L/Min
- ADA Compliant-ANSI A117.1 (Lever handles only)



Dimensions

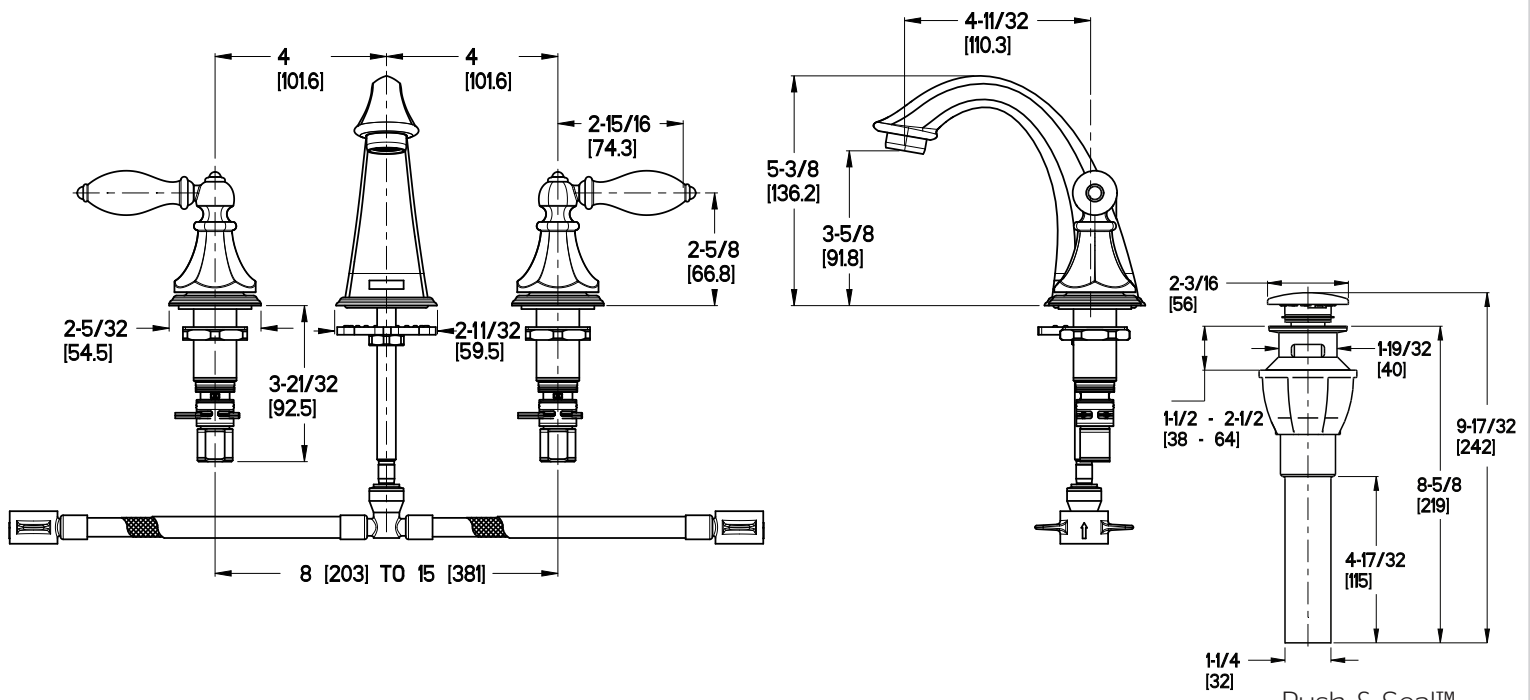

Ø1 Min to Ø1-1/2 Max. Deck Hole Openings