


LF529-7AYS Finish(S)

LF529-7AYY Finish(Y)

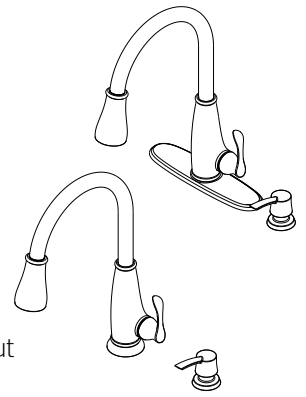

- 1 or 3-Hole Installation Spout
- 3 Function Spray Head
- Pforever Seal™

## Specifications

### Features

- 1.8 GPM Flow Rate
- 1 or 3-Hole Installation; Deck Plate or Single Hole Mounting Option
- 3 Function Pull-Down Sprayer
- 360° Rotating Spout
- High Arc Spout
- Quick Install Tool
- Soap Dispenser Included
- Pforever Seal™
- Ceramic Disc Valve
- Limited Lifetime Warranty



### Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified to ASME A112.18.1/CSA B125.1 including:
  - ASME A112.18.3 (Backflow Prevention)
- NSF/ANSI/CAN61:Q≤1
- CEC Certified/CALGreen compliant
- ADA Compliant - ANSI A117.1 (Lever Handles Only)



## Dimensions

