

Specifications

Features

- 1.2 GPM Flow Rate
- 8-15" Adjustable Widespread
- Fixed Hubs
- High Arc Spout
- 360° Rotating Spout
- Quick Install Tool
- Push & Seal™ Drain
- Limited Lifetime Warranty


Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified to ASME A112.18.1/CSA B125.1
- NSF/ANSI/CAN61:Q≤1
- CEC Certified/CALGreen compliant
- ADA Compliant – ANSI A117.1 (Lever Handles Only)



Dimensions

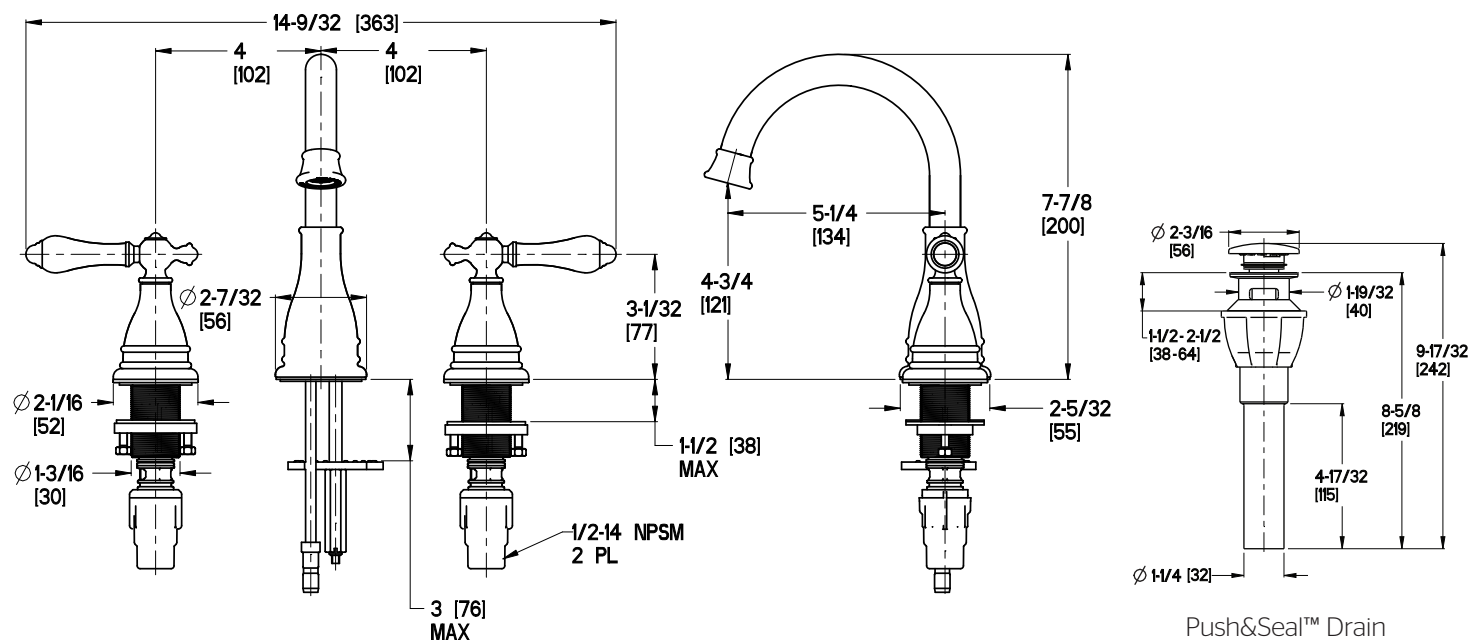

Ø1 Min to Ø1-1/2 Max. Deck Hole Openings