


- LG16-3TNTC Finish(C)
- LG16-3TNTK Finish(K)
- LG16-3TNTB Finish(B)
- LG16-3TNTBG Finish(BG)

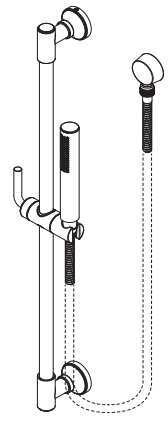

Specifications

Features

- 1.8 GPM Flow Rate
- 60" Metal Hose
- Adjustable Heights
- Adjustable Cradle
- All Metal Handheld
- Easy to Clean Nozzles
- Works with Tenet Diverter Trim and Valve
- Includes Mounting Hardware
- Not To Be Used As A Grab Bar
- Optional Crosshandle Available, Order HHL-G16-TNT* Separately
- Pforever Warranty®

Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified
- CSA B125 Certified
- ASME A112.18.1
- Cal Green Compliant
- CEC Compliant
- EPA WaterSense Certification 1.8 gpm, 6.8 L/Min
- ADA Compliant-ANSI A117.1 (Lever handles only)
- ASME A112.18.3 (Backflow Prevention)



Dimensions

